

产品保用条款

所有盈禾脚轮的产品对由于原材料和生产工艺缺陷而造成的损坏，自产品出厂之日起保用一年。但因使用不当、超载、改装错误而造成的损坏责任除外。经我厂认可的因质量而退货的产品将获得免费更换（运费和安装费用由客户自理）。本保用条款仅对产品本身而言，不含有其他的承诺，即明示或默示保证。这种保用补偿仅限于合约上的免费更换，我厂不负担其他责任，包括因事故、相关损失或特殊损坏等产生的责任。

TERMS OF GUARANTEE

Inford Caster Factory guarantees the quality of all products within 12 months from the date of delivery. If the product is damaged due to production quality problems during the warranty period, the factory will replace the product free of charge but excluding freight and installation fee. In addition, the factory assumes no responsibility and will not bear any other costs and losses, including but not limited to disassemble or transform the product without permission or accidents caused by improper use by the users.

重要事项

- 1.图标尺寸与实物尺寸或有轻微差异，本厂有权修改或取消相关产品，恕不另行通知。若使用过期或作废的图纸，工厂将不承担任何责任。
- 2.有关工程项目的具体尺寸数据请与厂商联系确认。
- 3.因印刷关系，实际产品颜色与目录所示存在部分差异，一切以实物颜色为准。



ATTENTIONS

1. Size marking in catalog may be slightly different from the size of real product. Factory owns the right to modify or cancel the relevant products without prior notice. The factory will not be responsible for the usage of expired or invalid drawings.
2. Please contact the manufacturer to confirm the specific data for any project.
3. Color may be affected by printing, pictures in catalog for reference only. The actual product should be considered as final.

ROLLING WITH THE TIMES

与时俱进

INFORD 盈禾



website



official accounts

广东盈载脚轮有限公司
广东省佛山市顺德区容桂街道扁滘
社区工业区和丰路3号首层

中山市盈禾脚轮有限公司
广东省中山市南头镇尚义路2号

电话: +86-757-28377675
邮箱: sales@infordcaster.com
网站: www.infordcaster.com

GUANGDONG INDRIVA CASTER LIMITED
3RD HEFENG ROAD, BIANJIAO, RONGGUI,
SHUNDE, FOSHAN, GUANGDONG, CHINA

ZHONGSHAN INFORD CASTER LIMITED
NO.2, SHANGYI ROAD, NANTOU,
ZHONGSHAN, CHINA

TEL: +86-757-28377675
EMAIL: sales@infordcaster.com
Website: www.infordcaster.com



目录 CONTENTS

02 公司简介 Company profile	31 D26矮款全塑双轮 Design twin wheel caster -low height
03 符号、膨胀杆、轴承 Symbol, EXPanding socket, Bearing	32 D27全塑双轮 Design twin wheel caster
04 质量控制管理 Quality	33 S10/S11/S17/S19 购物车轮 Shopping cart caster
05 型号说明 Models	34 J36/J48日式双轮 Medium heavy duty caster
07 刹掣 Brakes	35 S15/S16中轻型购物车轮 Shopping cart caster
08 脚轮的注意事项 How to use the caster	36 S25中轻型购物车轮 Shopping cart caster
09 J11日式轻型 Light duty caster	37 S12/S28购物车电梯轮 Shopping cart walkway casters
10 J12日式轻型 Light duty caster	38 A10美式喷油中轻型 Light duty caster
11 J13日式aster精致型 Light euty caster	39 A21美式中型 Medium duty caster
12 J17/18日式中轻型 Light duty caster	40 A22美式不锈钢中型 Stainless steel medium duty caster
13 J15/A15日式/美式中轻型 Light duty caster	41 X22美式不锈钢通用型 Stainless steel transport caster
15 E10欧式中轻型 Institutional caster	42 E21欧式通用型 Transport caster
17 E11欧式中轻型 Institutional caster	43 E22欧式不锈钢通用型 Stainless Steel transport caster
19 E12欧式不锈钢中轻型 Stainless steel institutional caster	44 E23欧式大众型 Transport caster
20 E14欧式中轻型双轮 Institutional twin wheel caster	45 E31/A31欧式/美式中重型 Medium heavy duty caster
21 E15欧式中型 Medium duty caster	46 E20欧式工业轮 Industrial caster
22 E16欧式不锈钢中型 Stainless steel medium duty caster	47 E23欧式复位轮 Swivel caster with load-dependent directional locking device
23 D10全塑仪器双轮 Apparatus twin wheel caster	48 J31日式中重型 Medium heavy duty caster
24 D12全塑仪器双轮 Apparatus twin wheel caster	49 J41日式重型 Japanese heavy duty caster
25 D11全塑双轮 Design twin wheel caster	50 JFB日本地刹器 Japanese floor brake
26 D13全塑中轻型 Design caster	51 J32日式不锈钢巨霸 Stainless Steel Medium Heavy Duty Caster
27 D15塑架中型 Design caster	52 J34带调节架商用机器轮 Medium heavy duty caster
29 D22塑盖脚轮 Design caster	53 J33带调节架商用机器轮 Medium heavy duty caster
30 D25矮款全塑双轮 Design twin wheel caster-low height	54 J35带调节架小霸王轮 Medium heavy duty caster

INFORD® 盈禾® 脚轮

SINCE

1981



- MORE THAN 60 SERIES
 - TWO BRANDS INFORD AND BBT
 - MORE THAN 3000 KINDS OF PRODUCTS
- 盈禾脚轮 与时俱进**
ROLLING WITH THE TIMES

CASTER & WHEEL

公司简介 ABOUT US

盈禾五金脚轮厂创立于1981年，是中国各类脚轮的专业生产制造商。历经40年来的钻研和发展，公司目前拥有技术创新的盈禾（INFORD）和经济实用的步步通（BBT）两大品牌。

我厂产品种类齐全，质量可靠，涵盖美式、欧式、日式等系列超过3000款产品，广泛应用于各行各业，畅销国内外市场。拥有先进的自动化设备，优质上乘的材料，创新的核心技术，这让我们在同行业中处于领先地位。盈禾还可以根据用户不同的需求，设计并提供专业具体的解决方案以及高性价比的定制配套产品。

Inford Caster Factory was established in 1981 and specialize in casters manufacture. With over 40 years study and develop, we owned two brands **INFORD** which focus on innovation and **BBT** which indicate economical and practical products.

Inford offers more than 3000 different kinds of casters and wheels included American standard, European standard, Japanese standard etc. All products are widely used in every walk of life and selling well in the domestic and overseas. Also, with our professional technology and experience Inford can provide a custom solution for any caster application.



Symbols 符号说明

轮径	Wheel diam		mm
轮宽	Width of tyre		mm
承载	Load capacity		kg
安装高度	Overall height		mm
转动半径	Swivel radius		mm
丝杆尺寸	Threaded stem size		mm
孔径直径	Bolt hole diam		mm
轴孔尺寸	Axle hole		mm

轴承种类	Type of bearing	
特尔灵轴承	Deling bearing	
轴套轴承	Plain bearing	
滚柱轴承	Roller bearing	
一体式精密滚珠轴承	Annular ball bearing	
单滚珠轴承	Single ball bearing	
双滚珠轴承	Double ball bearing	
凸台厚度	Length of hub	

EXPANDING SOCKET 膨胀螺杆



Expanding fittings for round tubes	for tube inside-φmm
ER21.5	φ19-21.5
ER24	φ21.5-24
ER27	φ24-27
ER30	φ27-30



Expanding fittings for square tubes	for tube inside-φmm
ES21.5	φ19-21.5
ES24	φ21.5-24
ES27	φ24-27
ES30	φ27-30

BEARINGS 轴承

	特尔灵轴承 Deling
	轴套 Plain
D	

特尔灵是高科技工程塑料，适用于严寒酷暑，干燥，潮湿和腐蚀的各种恶劣环境。

	滚柱 Roller
	轴套 Plain
R	

相对于同规格的滚珠轴承,它能承载较重的负荷。

	滚珠 Ball
	简装轴承,经济适用
P	

转动灵活,静音

Standard 标准

本公司在质量控制管理上是根据ISO9001:2015; 欧洲EN, 欧洲ROHS美国NSF日本JIS等标准，并取得相关的证书(可向本公司索取)。

Our quality control is base on ISO9001:2015. Additionally, we can make product which can meet the Rohs Standard(EN) and NSF Standard(US)

Speed test 测试速度标准

欧洲标准:EN12530小脚轮3.0km/h,EN12532手推车轮4.0km/h.

美国标准:ICWM <中型2.0km/h, ≥重型3.2km/h.

日本标准:JIS <100mm 2.0km/h, ≥100mm 4km/h

European standard: trundle 3.0km/h, cart wheel 4.0km/h

American standard: <medium duty 2.0km/h, ≥ heavy duty 3.2km/h

Japanese standard: <100mm 2.0km/h, ≥ 100mm 4km/h



Walking test 脚轮行走性能测试

行走性能试验为, 负荷最大载重后, 以一定的速度在钢铁的转盘上行走, 可以看到轮胎是否龟裂或剥离, 是否圆滑回转, 是否发生异响。

Life circle running test: Under the maximum capacity, the caster runs at a certain speed on the steel board so as check the wheel rolling situation, noise and the tire distortion.



Rotary test 单轮回转性能测试

把单轮放在水平的试验平面上, 让其负荷规定的最大载重, 系上与试验面平行的绳子, 通过滑轮逐渐加码, 测定车轮回转到1/2时砝码的质量

Single wheel rolling test: Fix the single wheel in the horizontal test board and load the maximum capacity. Tie the wheel with horizontal line, add the weight through the pulley. Calculate the weight when the wheel roll at a distance of 1/2



Rotation test 旋转性能测试

旋转性能测试, 把脚轮固定在试验机的支架臂上, 对着脚轮的车轮方向, 调整启动角度为90度, 让脚轮负荷最大的载重后使其旋转, 看旋转倾向。

Turning function test: Firstly, the caster is fixed on fork of the equipment, shift the starting angle of the wheel upright to the equipment fork and load the maximum capacity, then turn the caster direction to inspect the turning tendency.



Other tests 其它测试

其它测试包括表面耐腐蚀测试(盐雾测试), 跌落测试, 塑料抗冲击测试, 五金与塑料硬度测试, 刹掣次数测试等等。(相关数据可向本公司索取)

Other test: Including Anti-corroding test, Drop test, Impact test, Material hardness test, Brake life test and etc.

N-Nylon,(Polyamide),injected 注塑尼龙	M-Mold on nylon ,casted 浇铸尼龙	U-Polyurethane, injected 注塑聚氨酯	V-Polyurethane, casted 浇铸聚氨酯	T-Thermoplastic rubber 85°A 85°A人造胶	X-Elastic Thermoplastic rubber 65°A 65°A人造胶	R-Rubber vulcanized 75°A硫化橡胶	E-Elastic rubber,vulcanized 65°A硫化弹力橡胶
A-American standard caster 美式标准脚轮	D-Design caster 设计型脚轮	E-European standard caster 欧式标准脚轮	J-Japanese standard caster 日式标准脚轮	S-Shopping cart caster 购物车脚轮			
A Standard series 标准系列	21 Housing series 支架系列	X Wheel tread 轮胎材料	P Wheel body 轮芯材料	A Bearing and others 轴承及其他	J Serial number 流水号	100 Wheel diameter 单轮直径(mm)	S Fixing 连接方式
1-Light duty 轻型	A-Aluminium 铸铝	A~Z	25~300	B1 Brake 刹掣			
2-Medium duty 中型	B-Acrylonitrile butadiene styrene ABS树脂			B1-Metal side wheel brake 金属侧刹			
3-Medium heavy duty 中重型	D-Design hub 通花设计			B2-Nylon wheel brake 尼龙轮刹			
4-Heavy duty 重型	H-Hi-temp nylon, injected 耐高温尼龙			B3-Metal total brake 金属双刹			
5-Super heavy duty 超重型	M-Mold on nylon, casted 浇铸尼龙			B4-Nylon total brake 尼龙连体双刹			
6-Super heavy duty 超重型	N-Nylon(Polyamide), injected 注塑尼龙			B5-Nylon total brake 尼龙叠状双刹			
7-Extra heavy duty 特重型	Polypropylene(PP), injected 注塑聚丙烯			B6-Metal total brake 金属叠状双刹			
	U-Polyurethane(PU), injected 注塑聚氨酯						

刹车型号参数 Brake

金属侧刹	B1 Metal side wheel brake	尼龙轮刹	B2 Nylon wheel brake
金属双刹	B3 Metal total brake	尼龙连体双刹	B4 Nylon total brake
尼龙叠状双刹	B5 Nylon total brake	金属叠状双刹	B6 Metal total brake
金属叠状轮刹	B7 Metal wheel brake	金属侧双刹	B8 Metal total side brake
金属后双刹	B9 Metal total brake	金属后双刹	B10 Metal total brake
升降刹	B12 Nylon total brake		
中控两档刹车 (长杆: 一档刹车和转动、二档方向刹)	B14 Long stem central&directional brake		
中控两档刹车 (短杆: 一档刹车和转动、二档方向刹)	B16 Short stem central&directional brake		
前踢双刹	B22 Kick pedal total brake	钢线双刹	B23 Wire total brake
合金双刹	B24 Alloy total brake	前踢轮刹	B28 Kick pedal wheel brake
合金轮刹	B29 Alloy wheel brake	脚挡	Foot protection(FP)
金属方向刹	Directional brake(DL)		

L-Threaded stem rigid
丝杆固定

K-Solid plug rigid
插杆固定

S-Top plate swivel
活动式

R-Top plate rigid
固定式

T-Threaded stem
丝杆式

H-Bolt hole
孔顶式

P-Round solid plug
圆型插杆式

E-Expanding socket
膨胀杆式

轮胎材料 Wheel tread

A	Antistatic	防静电材料
C	Conductive	导电材料
E	Elastic rubber, vulcanized	65°A硫化弹力橡胶
F	Fiberglass Nylon, injected	注塑玻纤尼龙
H	Hi-temp Nylon, injected	耐高温尼龙
I	Cast iron	铸铁
L	Polyurethane foam	发泡聚氨酯
M	Mold on Nylon ,casted	浇铸尼龙
N	Nylon(Polyamide), injected	注塑尼龙
P	Polypropylene(PP), injected	注塑聚丙烯
Q	Pneumatic	充气橡胶
R	Rubber, vulcanized	75°A硫化橡胶
S	Polyether	聚醚
T	Thermoplastic rubber(TPR) 85°A	85°A人造胶
U	Polyurethane(PU), injected	注塑聚氨酯
V	Polyurethane(PU), casted	浇铸聚氨酯
W	Elastic polyurethane, casted 75°A	75°高弹浇铸聚氨酯
X	Thermoplastic rubber(TPR) 65°A	65°A人造胶

轴承及其他 Bearing and others


A	Single ball bearing	单滚珠轴承
B	Double ball bearing	双滚珠轴承
C	Stainless steel double ball bearing	不锈钢双滚珠轴承
D	Deling & stainless steel plain	特尔灵+不锈钢轴套
E	Deling & plain	特尔灵+(铁)轴套
F	Plain with thread guard	轴套(含盖)
G	Double ball bearing with thread guard	双滚珠轴承(带大盖)
H	Integrated bearing	一体轴承
J	Roller with thread guard	滚柱轴承(带大盖)
K	Stainless steel roller bearing	不锈钢滚柱轴承
L	Stainless steel plain	不锈钢轴套
M	Double ball bearing & stainless steel plain	双滚珠轴承+ 不锈钢轴套
N	Stainless steel roller bearing with stainless steel thread guard	不锈钢滚柱轴承 (带不锈钢盖)
P	Plain	轴套
R	Roller	滚柱轴承
S	Stainless steel single ball bearing	不锈钢单滚珠轴承
T	Taper bearing	锥形轴承

轮芯材料 Wheel body

A	Aluminum	铝
B	Acrylonitrile butadiene styrene	ABS
D	Design hub	通花设计
F	Fiberglass nylon, injected	注塑玻纤尼龙
H	Hi-temp nylon, injected	耐高温尼龙
I	Cast iron	铸铁
J	Fiberglass polypropylene(PP)	玻纤PP
M	Mold on nylon, casted	浇铸尼龙
N	Nylon(Polyamide), injected	注塑尼龙
O	Identical with tread	与轮皮相同
P	Polypropylene(PP), injected	注塑聚丙烯
R	Rubber, vulcanized	硫化橡胶
S	Steel, pressed	铆合铁
U	Polyurethane(PU), injected	注塑聚氨酯

流水号 Serial Number

轻型及中轻型	A B C D E F G H
中型及中重型	J K L M N P Q R S
重型	T U V W X Y Z
特殊	O I

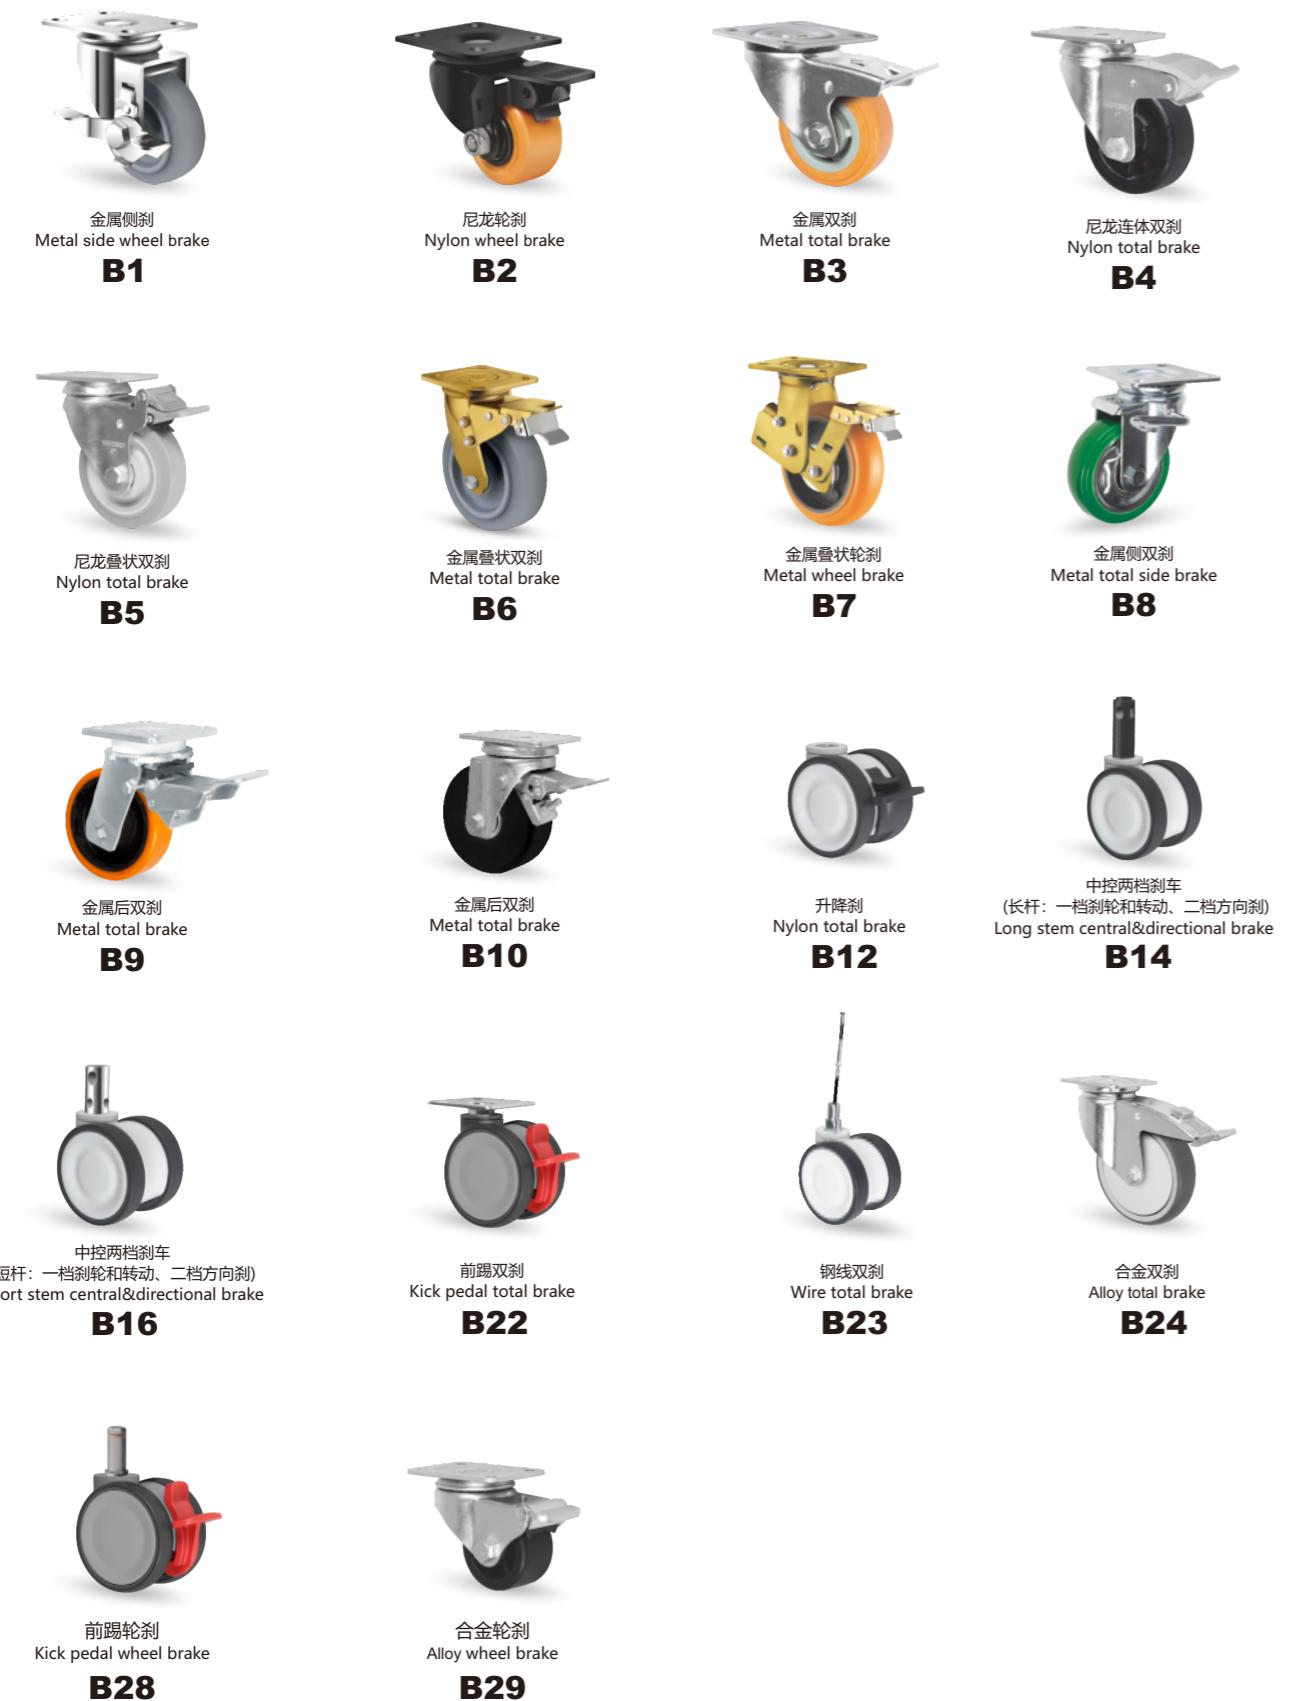

How to Use The Caster 使用脚轮的注意事项

用途

脚轮：单轮是装在搬运推车及机器上，使用间断性的人力推行，作为搬运用的，请根据使用目的和条件选择合适的脚轮来安装。

脚轮的选择

• 最大的负荷
选择脚轮时，请把搬运推车等自身的总负荷作为选择标准。目录上的最大负荷是指单个脚轮安全使用的负荷限度。4个同时使用时，请按照如下乘以0.8的方法计算。
总负荷的限度=单个的最大负荷×4×0.8

脚轮的安装

脚轮的安装请遵守以下注意事项
请使用相同系列的脚轮安装。
请确保安装平面呈水平状态。
万向式脚轮，请确保旋转轴要垂直。
定向式脚轮，请确保二轮平行。
使用符合安装孔尺寸的螺栓·螺帽·垫圈，拧紧脚轮到没有空隙为止。

使用时的注意事项

• 使用环境
脚轮为常温构造的设计，请使用人力在平坦的地面上推行，避免在有酸·碱·盐·油水以及明显凹凸不平的地面上行走。另外，在60°C以上的高温和零下5°C的低温等特别环境使用时，请确认目录上的参数，或者咨询公司。目录所标示的适用温度只是对车轮。
• 制动器
脚轮的制动器有左右分别，(通常在没有注明的情况下，出厂的是右刹。)带有制动器的脚轮经过长期使用会产生磨损，可能不知不觉地降低了制动力，在使用时请检查刹车片的磨损度，注意强烈冲击。
1. 请用穿有鞋子的脚充分地踩踏刹车板。
2. 在刹车情况下请勿随便推动。
3. 在刹车的情况下请勿放在斜坡上。
4. 推行时请勿踩刹车。
• 设定条件
1. 请勿超过最大载重以上的负荷。
2. 本产品使用于平坦的地面，请不要使其从有落差的高处掉下来，避免受到冲击。
3. 如果需要动力搬运和牵引的，请咨询本公司。
4. 避免在叉车上的上下使用。
• 产品的改造
请勿随意改造或使用其他规格的配件修理。随意更改引起的后果本公司概不负责。

不要有类似下列的使用方法△




WHEEL MATERIAL 单轮材料的性能特点

	胎面硬度 Hardness	适用温度范围 Temperature Range	转动灵活性 Agility	转动宁静 Noise Reduction	底板保护 Floor Protection	无轮印 No Mark	耐磨损 Abrasion Resistance	防水性能 Water	防化学品性能 Mind Chemicals	抗震性能(弹性) Shock Reduction	轻松启动行走 Easy Startup
天然弹力胶 Elastic Rubber	70~75A	-25~80°C	★	★★★	★★★	★★★	★★	★★★	★	★★★	★
橡胶 Rubber	75~80A	-25~80°C	★	★★	★★★	☆	★	★★★	☆	★★	★
导电橡胶 Conductive Rubber	90~95A	-25~80°C	★★	★★★	★★★	★★★	★	★★★	☆	★★	★★
导电人造胶 Conductive TPR	90~95A	-25~85°C	★★	★★★	★★★	★★★	★	★★★	★	★★	★★
超级人造胶 Super TPR	90~95A	-25~85°C	★★	★★★	★★★	★★★	★	★★★	★	★★	★★
超级聚氨酯 PU ON PP	90~95A	-25~85°C	★★	★★★	★★★	★★★	★	★★★	★	★★★	★★
铁芯聚氨酯 PU ON Cast Iron	90~95A	-25~85°C	★★	★★	★★★	★★★	★	★★★	☆	★★★	★★
特硬聚氨酯 Hard PU	60~70D	-25~85°C	★★★	★★	★★	★★★	★★★	★★★	★	★★	★★
聚丙烯 Polypropylene	60~70D	-40~85°C	★★★	☆	☆	★★★	★	★★★	★★★	☆	★★★
尼龙 Nylon(Polyamide)	60~70D	-40~85°C	★★★	☆	☆	★★★	★★★	☆	★★	☆	★★★
耐高温尼龙 Hi-temp Nylon	60~70D	-50~230°C	★★★	☆	☆	★★★	★★★	★★★	★★	☆	★★★

INFORD®

J11 Light duty casters 日式轻型/軽荷重用

10-65kg

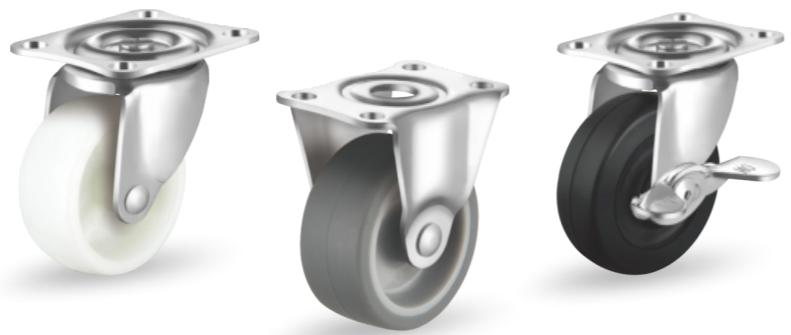

			TPPA / 人造胶轮/PPホイール熱可塑性ゴム卷車輪								
			Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Plain								
Swivel caster 旋回式	Swivel caster with side brake 旋回式ストッパー付	Rigid caster 固定式									
J11 TPPA 025 S			025	12	35X30	28X23	4.2	9	35	10	
	J11 TPPA 025 R		025	12	37X18	29X0	4.2		35	10	
J11 TPPA 032 S			032	14	38X32	30X24	4.2	10	42	18	
	J11 TPPA 032 R		032	14	36X20	29X0	4.2		42	18	
J11 TPPA 038 S	J11 TPPA 038 SB1		038	17	46X38	36X28	5.3	15	50	28	
	J11 TPPA 038 R		038	17	45X25	36X15	5.3		50	28	
J11 TPPA 050 S	J11 TPPA 050 SB1		050	20	59X47	46X35	6.5	16	65	38	
	J11 TPPA 050 R		050	20	58X40	45X25	6.5		65	38	
J11 TPPA 065 S	J11 TPPA 065 SB1		065	27	70X58	55X42	8.8	21	80	55	
	J11 TPPA 065 R		065	27	70X47	55X28	8.8		80	55	
J11 TPPA 075 S	J11 TPPA 075 SB1		075	27	70X58	55X42	8.8	21	90	65	
	J11 TPPA 075 R		075	27	70X47	55X28	8.8		90	65	

			NNPA/尼龙轮 / ナイロン一体車輪								
			Tread:Nylon Centre:Nylon Bearing:Plain								
Swivel caster 旋回式	Swivel caster with side brake 旋回式ストッパー付	Rigid caster 固定式									
J11 NNPA 025 S			025	12	35X30	28X23	4.2	9	35	10	
	J11 NNPA 025 R		025	12	37X18	29X0	4.2		35	10	
J11 NNPA 032 S			032	14	38X32	30X24	4.2	10	42	18	
	J11 NNPA 032 R		032	14	36X20	29X0	4.2		42	18	
J11 NNPA 038 S	J11 NNPA 038 SB1		038	17	46X38	36X28	5.3	15	50	28	
	J11 NNPA 038 R		038	17	45X25	36X15	5.3		50	28	
J11 NNPA 050 S	J11 NNPA 050 SB1		050	20	59X47	46X35	6.5	16	65	38	
	J11 NNPA 050 R		050	20	58X40	45X25	6.5		65	38	
J11 NNPA 065 S	J11 NNPA 065 SB1		065	25	70X58	55X42	8.8	21	80	55	
	J11 NNPA 065 R		065	25	70X47	55X28	8.8		80	55	
J11 NNPA 075 S	J11 NNPA 075 SB1		075	25	70X58	55X42	8.8	21	90	65	
	J11 NNPA 075 R		075	25	70X47	55X28	8.8		90	65	

			RRPA/橡胶轮 ゴム一体車輪								
			Tread:Rubber Centre:Rubber Bearing:Plain								
Swivel caster 旋回式	Swivel caster with side brake 旋回式ストッパー付	Rigid caster 固定式									
J11 RRPA 025 S			025	12	35X30	28X23	4.2	9	35	8	
	J11 RRPA 025 R		025	12	37X18	29X0	4.2		35	8	
J11 RRPA 032 S			032	14	38X32	30X24	4.2	10	42	12	
	J11 RRPA 032 R		032	14	36X20	29X0	4.2		42	12	
J11 RRPA 038 S	J11 RRPA 038 SB1		038	17	46X38	36X28	5.3	15	50	20	
	J11 RRPA 038 R		038	17	45X25	36X15	5.3		50	20	
J11 RRPA 050 S	J11 RRPA 050 SB1		050	20	59X47	46X35	6.5	16	65	30	
	J11 RRPA 050 R		050	20	58X40	45X25	6.5		65	30	
J11 RRPA 065 S	J11 RRPA 065 SB1		065	26	70X58	55X42	8.8	21	80	40	
	J11 RRPA 065 R		065	26	70X47	55X28	8.8		80	40	
J11 RRPA 075 S	J11 RRPA 075 SB1		075	26	70X58	55X42	8.8	21	90	50	
	J11 RRPA 075 R		075	26	70X47	55X28	8.8		90	50	

INFORD®

J12 Light duty casters 日式轻型/軽荷重用

10-40kg




			TPPA/TPPC/人造胶轮/PPホイール熱可塑性ゴム卷車輪								
			Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Plain								
Swivel caster 旋回式	Swivel caster with side brake 旋回式ストッパー付	Rigid caster 固定式									
J12 TPPA 050 S	J12 TPPA 050 SB1		050	20	70X42	56X28	6.5	22	65	30	
J12 TPPC 075 S	J12 TPPC 075 SB1		075	20	70X42	56X28	6.5	28	92	40	

			TPPA/TPPC/人造胶轮/PPホイール熱可塑性ゴム卷車輪
--	--	--	--------------------------------

INFORD®

J13 Light duty casters 日式精致型/轻荷重用

10-20kg



			TPAB/人造胶轮(咖啡色)/PPホイール熱可塑性ゴム巻車輪							
			Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing							
Swivel caster 旋回式	Swivel caster with wheel brake 旋回式ストッパー付	Rigid caster 固定式	mm	mm	mm	mm	mm	mm	mm	kg
J13 TPAB 025 S	J13 TPAB 025 SB2		25	13	39X33	30X24	4.2	14/15	38	10
	J13 TPAB 025 R		25	13	39X33	30X24	4.2		38	10
J13 TPAB 032 S	J13 TPAB 032 SB2		32	13	39X33	30X24	4.2	14/15	45	15
	J13 TPAB 032 R		32	13	39X33	30X24	4.2		45	15
J13 TPAB 038 S	J13 TPAB 038 SB2		38	17	46X40	36X28	5.2	18/19	52	20
	J13 TPAB 038 R		38	17	46X40	36X28	5.2		52	20

			TPAB/人造胶轮(咖啡色)/PPホイール熱可塑性ゴム巻車輪							
			Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing							
Thread stem caster ねじ込み式	Thread stem caster with wheel brake ねじ込み式ストッパー付		mm	mm	mm	mm	mm	mm	mm	kg
J13 TPAB 025 T	J13 TPAB 025 TB2		25	13	M6X15			14/15	38	10
J13 TPAB 032 T	J13 TPAB 032 TB2		32	13	M6X15			14/15	45	15
J13 TPAB 038 T	J13 TPAB 038 TB2		38	17	M8X15			18/19	52	20

			TPPA/人造胶轮(灰色)/PPホイール熱可塑性ゴム巻車輪							
			Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Plain							
Swivel caster 旋回式	Swivel caster with wheel brake 旋回式ストッパー付	Rigid caster 固定式	mm	mm	mm	mm	mm	mm	mm	kg
J13 TPPA 025 S	J13 TPPA 025 SB2		25	12	39X33	30X24	4.2	14/15	38	10
	J13 TPPA 025 R		25	12	39X33	30X24	4.2		38	10
J13 TPPA 032 S	J13 TPPA 032 SB2		32	14	39X33	30X24	4.2	14/15	45	15
	J13 TPPA 032 R		32	14	39X33	30X24	4.2		45	15
J13 TPPA 038 S	J13 TPPA 038 SB2		38	17	46X40	36X28	5.2	18/19	52	20
	J13 TPPA 038 R		38	17	46X40	36X28	5.2		52	20

			TPPA/人造胶轮(灰色)/PPホイール熱可塑性ゴム巻車輪							
			Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Plain							
Thread stem caster ねじ込み式	Thread stem caster with wheel brake ねじ込み式ストッパー付		mm	mm	mm	mm	mm	mm	mm	kg
J13 TPPA 025 T	J13 TPPA 025 TB2		25	12	M6X15			14/15	38	10
J13 TPPA 032 T	J13 TPPA 032 TB2		32	14	M6X15			14/15	45	15
J13 TPPA 038 T	J13 TPPA 038 TB2		38	17	M8X15			18/19	52	20

INFORD®

J17/J18 Light duty casters 日式中轻型/轻荷重用

150kg



J17 J18




			NNPF/尼龙轮(黑色)/ナイロン一体車輪									
			Tread:Nylon Centre:Nylon Bearing:Plain									
Swivel caster 旋回式	Swivel caster with alloy wheel brake 旋回式ストッパー付	Rigid caster 固定式	mm	mm	mm	mm	mm	mm	mm	kg		
J17 NNPF 050 S	J17 NNPF 050 SB29		50	28	70X54	54X36	6.5	25	68	200		
	J17 NNPF 050 R		50	28	80X54	66/54X36	6.5		68	200		
Thread stem caster ねじ込み式	Thread stem caster with alloy wheel brake ねじ込み式ストッパー付		mm	mm	mm	mm	mm	mm	mm	kg		
J17 NNPF 050 T	J17 NNPF 050 TB29		50	28	M12X25					25	68	200

			NNPG/尼龙轮(黑色)/ナイロン一体車輪							
			Tread:Nylon Centre:Nylon Bearing:Plain							
Swivel caster 旋回式	Swivel caster with side brake 旋回式ストッパー付	Rigid caster 固定式	mm	mm	mm	mm	mm	mm	mm	kg
J18 NNPG 050 S1	J18 NNPG 050 S1B1		50	28	70X54	54X36	6.5	25	68	150
J18 NNPG 050 S2	J18 NNPG 050 S2B1		50	28	64X64	50X50	6.5	25	68	150
	J18 NNPG 050 R		50	28	80X54	66/54X36	6.5		68	150

			MMBF/浇铸尼龙轮							
			Tread:MC Nylon Centre:MC Nylon Bearing:Double ball bearing							
Swivel caster 旋回式	Swivel caster with wheel brake 旋回式ストッパー付	Rigid caster 固定式	<img							

J15/A15 Light duty casters 日式/美式中轻型

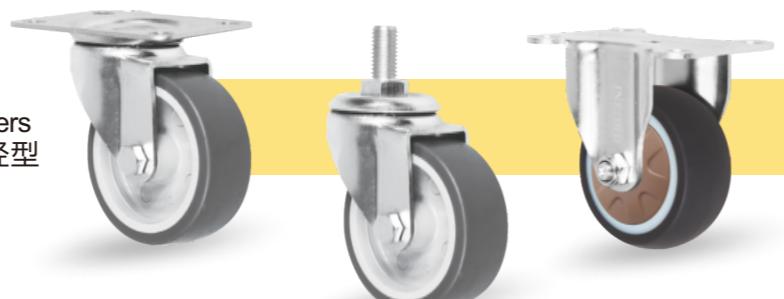


				TPAB/人造胶轮(咖啡色)/PPホイール熱可塑性ゴム卷車輪						
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing										
Swivel caster 旋回式	Swivel with side brake 旋回式ストッパー付	Rigid caster 固定式	mm	mm	mm	mm	mm	mm	mm	kg
J15 TPAB 065 S	J15 TPAB 065 SB1	J15 TPAB 065 R	65	27	70X58	55X42	9	25	85	50
J15 TPAB 075 S	J15 TPAB 075 SB1	J15 TPAB 075 R	75	27	70X58	55X42	9	25	93	50
J15 TPAB 100 S	J15 TPAB 100 SB1	J15 TPAB 100 R	100	27	70X58	55X42	9	25	122	60
A15 TPAB 065 S	A15 TPAB 065 SB1	A15 TPAB 065 R	65	27	92X63.5	76.2/71.4X44.5	9	25	85	50
A15 TPAB 075 S	A15 TPAB 075 SB1	A15 TPAB 075 R	75	27	92X63.5	76.2/71.4X44.5	9	25	93	50
A15 TPAB 100 S	A15 TPAB 100 SB1	A15 TPAB 100 R	100	27	92X63.5	76.2/71.4X44.5	9	25	122	60


				TPPA/TPPE人造胶轮(灰色)/PPホイール熱可塑性ゴム卷車輪						
				Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Plain						
Swivel caster 旋回式	Swivel with side brake 旋回式ストッパー付	Rigid caster 固定式		mm	mm	mm	mm	mm	mm	kg
J15 TPPA 065 S	J15 TPPA 065 SB1	J15 TPPA 065 R	65	27	70X58	55X42	9	25	85	50
J15 TPPA 075 S	J15 TPPA 075 SB1	J15 TPPA 075 R	75	27	70X58	55X42	9	25	93	50
J15 TPPE 100 S	J15 TPPE 100 SB1	J15 TPPE 100 R	100	25	70X58	55X42	9	25	122	60
A15 TPPA 065 S	A15 TPPA 065 SB1	A15 TPPA 065 R	65	27	92X63.5	76.2/71.4X44.5	9	25	85	50
A15 TPPA 075 S	A15 TPPA 075 SB1	A15 TPPA 075 R	75	27	92X63.5	76.2/71.4X44.5	9	25	93	50
A15 TPPE 100 S	A15 TPPE 100 SB1	A15 TPPE 100 R	100	25	92X63.5	76.2/71.4X44.5	9	25	122	60

				NNPA/NOPA/尼龙轮(白色)/ナイロン一体車輪							
				Tread:Nylon Centre:Nylon Bearing:Plain							
Swivel caster 旋回式	Swivel with side brake 旋回式ストッパー付	Rigid caster 固定式									
J15 NNPA 065 S	J15 NNPA 065 SB1	J15 NNPA 065 R	65	25	70X58	55X42	9	25	85	50	
J15 NNPA 075 S	J15 NNPA 075 SB1	J15 NNPA 075 R	75	25	70X58	55X42	9	25	93	50	
J15 NOPA 100 S	J15 NOPA 100 SB1	J15 NOPA 100 R	100	25	70X58	55X42	9	25	122	60	
A15 NNPA 065 S	A15 NNPA 065 SB1	A15 NNPA 065 R	65	25	92X63.5	76.2/71.4X44.5	9	25	85	50	
A15 NNPA 075 S	A15 NNPA 075 SB1	A15 NNPA 075 R	75	25	92X63.5	76.2/71.4X44.5	9	25	93	50	
A15 NOPA 100 S	A15 NOPA 100 SB1	A15 NOPA 100 R	100	25	92X63.5	76.2/71.4X44.5	9	25	122	60	

				RRPA/RRPB/橡胶轮 ゴム一体車輪						
Tread:Rubber Centre:Rubber Bearing:Plain										
Swivel caster 旋回式	Swivel with side brake 旋回式ストッパー付	Rigid caster 固定式	mm	mm						
J15 RRPA 065 S	J15 RRPA 065 SB1	J15 RRPA 065 R	65	26	70X58	55X42	9	25	85	40
J15 RRPA 075 S	J15 RRPA 075 SB1	J15 RRPA 075 R	75	26	70X58	55X42	9	25	93	50
J15 RRPB 100 S	J15 RRPB 100 SB1	J15 RRPB 100 R	100	26	70X58	55X42	9	25	122	60
A15 RRPA 065 S	A15 RRPA 065 SB1	A15 RRPA 065 R	65	26	92X63.5	76.2/71.4X44.5	9	25	85	40
A15 RRPA 075 S	A15 RRPA 075 SB1	A15 RRPA 075 R	75	26	92X63.5	76.2/71.4X44.5	9	25	93	50
A15 RRPB 100 S	A15 RRPB 100 SB1	A15 RRPB 100 R	100	26	70X58	55X42	9	25	122	60



A15



J15

E10 Institutional casters 欧式中轻型

40-70kg



			TPPE/超级人造胶轮(轴套)								
		Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Plain									
Swivel caster	Swivel caster with metal total brake										kg
E10 TPPE 050 S	E10 TPPE 050 SB3	50	18	60X60	48/38X48/38	6.3	25	70	40		
E10 TPPE 075 S	E10 TPPE 075 SB3	75	25	60X60	48/38X48/38	6.3	25	100	60		

			TPAE/高科技人造胶轮(单滚珠轴承)								
		Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing with thread guards									
Swivel caster	Swivel caster with metal total brake										kg
E10 TPAE 050 S	E10 TPAE 050 SB3	50	18	60X60	48/38X48/38	6.3	25	70	40		
E10 TPAE 075 S	E10 TPAE 075 SB3	75	25	60X60	48/38X48/38	6.3	25	100	60		

			PPPD/塑料轮(轴套)								
		Tread:Polypropylene Centre:Polypropylene Bearing:Plain									
Swivel caster	Swivel caster with metal total brake										kg
E10 PPPD 050 S	E10 PPPD 050 SB3	50	18	60X60	48/38X48/38	6.3	25	70	40		
E10 PPPD 075 S	E10 PPPD 075 SB3	75	25	60X60	48/38X48/38	6.3	25	100	60		

			UPPF/聚氨酯轮(轴套)								
		Tread: Polyurethane Centre: Polypropylene Bearing: Plain									
Swivel caster	Swivel caster with metal total brake										kg
E10 UPPF 050 S	E10 UPPF 050 SB3	50	18	60X60	48/38X48/38	6.3	25	70	40		
E10 UPPF 075 S	E10 UPPF 075 SB3	75	24	60X60	48/38X48/38	6.3	25	100	60		
E10 UPPF 100 S	E10 UPPF 100 SB3	100	25	77X67	61.5/56X51.5/46.5	8.5	28	125	70		

			UDBF/透明聚氨酯轮(双滚珠轴承)								
		Tread:Transparent Polyurethane Centre:Design hub (polypropylene) Bearing:Double ball bearing									
Swivel caster	Swivel caster with metal total brake										kg
E10 UDBF 075 S	E10 UDBF 075 SB3	75	24	60X60	48/38X48/38	6.3	25	100	60		

			TPPE/超级人造胶轮(轴套)								
		Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Plain									
Bolt hole caster	Bolt hole caster with metal total brake										kg
E10 TPPE 050 H	E10 TPPE 050 HB3	50	18							11	25
E10 TPPE 075 H	E10 TPPE 075 HB3	75	25							11	25
										100	60

			TPAE/高科技人造胶轮(单滚珠轴承)								
		Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing with thread guards									
Bolt hole caster	Bolt hole caster with metal total brake										kg
E10 TPAE 050 H	E10 TPAE 050 HB3	50	18							11	25
E10 TPAE 075 H	E10 TPAE 075 HB3	75	25							11	25
										100	60

			PPPD/塑料轮(轴套)								
		Tread:Polypropylene Centre:Polypropylene Bearing:Plain									
Bolt hole caster	Bolt hole caster with metal total brake										kg
E10 PPPD 050 H	E10 PPPD 050 HB3	50	18								

E11 Institutional casters 欧式中轻型/小力士轮

50-150kg



				TPPE/超级人造胶(轴套)							
				Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Plain							
Swivel caster	Rigid caster	Swivel caster with nylon total brake		∅ mm	mm	mm	mm	mm	mm	kg	
E11 TPPE 050 S	E11 TPPE 050 R	E11 TPPE 050 SB4	050	18	60x60	48/38x48/38	6.3	24	69	50	
E11 TPPE 075 S	E11 TPPE 075 R	E11 TPPE 075 SB4	075	25	60x60	48/38x48/38	6.3	24.5	100	75	
E11 TPPE 100 S		E11 TPPE 100 SB4	100	25	77X67	61.5/56X51.5/46.5	8.5	28	125	75	

				TPAE/高科技人造胶(单滚珠轴承)							
				Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing with thread guards							
Swivel caster	Rigid caster	Swivel caster with nylon total brake		∅ mm	mm	mm	mm	mm	mm	kg	
E11 TPAE 050 S	E11 TPAE 050 R	E11 TPAE 050 SB4	050	18	60x60	48/38x48/38	6.3	24	69	50	
E11 TPAE 075 S	E11 TPAE 075 R	E11 TPAE 075 SB4	075	25	60x60	48/38x48/38	6.3	24.5	100	75	
E11 TPAE 100 S		E11 TPAE 100 SB4	100	25	77X67	61.5/56X51.5/46.5	8.5	28	125	75	

				PPPD/塑料轮(轴套)							
				Tread:Polypropylene Centre:Polypropylene Bearing:Plain							
Swivel caster	Rigid caster	Swivel caster with nylon total brake		∅ mm	mm	mm	mm	mm	mm	kg	
E11 PPPD 050 S	E11 PPPD 050 R	E11 PPPD 050 SB4	050	18	60x60	48/38x48/38	6.3	24	69	50	
E11 PPPD 075 S	E11 PPPD 075 R	E11 PPPD 075 SB4	075	25	60x60	48/38x48/38	6.3	24.5	100	75	
E11 PPPD 100 S		E11 PPPD 100 SB4	100	25	77X67	61.5/56X51.5/46.5	8.5	28	125	75	

				VIBE/铁芯聚氨酯轮(双滚珠轴承)							
				Tread:Polyurethane Centre:Steel Bearing:Double ball bearing							
Swivel caster	Rigid caster	Swivel caster with nylon wheel brake	Swivel caster with nylon total brake	∅ mm	mm	mm	mm	mm	mm	kg	
E11 VIBE 035 S		E11 VIBE 035 SB2		35	25	60X60	48/38X48/38	6.3	20	58	100
	E11 VIBE 035 R			35	25	60X60	48/38X48/38	6.3	25	58	100
E11 VIBE 050 S		E11 VIBE 050 SB4	50	25	60X60	48/38X48/38	6.3	25	74	150	



Angle available
可选择角材安装

ER
Expanding round socket stem available
可选择圆形膨胀杆式

ES
Expanding square socket stem available
可选择方形膨胀杆式

				PPPD/塑料轮(轴套)									
				Centre:Polypropylene Centre:Polypropylene Bearing:Plain									
Bolt hole	caster	Bolt hole	caster with nylon total brake	∅ mm	mm	mm	mm	mm	mm	kg			
E11 PPPD 050 H		E11 PPPD 050 HB4		50	18					11	24	69	50
E11 PPPD 075 H		E11 PPPD 075 HB4		75	25					11	24.5	100	75
E11 PPPD 100 H		E11 PPPD 100 HB4		100	25					11	28.5	125	75

				VIBE/铁芯聚氨酯轮(双滚珠轴承)									
				Tread:Polyurethane Centre:Steel Bearing:Double ball bearing									
Bolt hole	caster	Bolt hole	caster with nylon wheel brake	∅ mm	mm	mm	mm	mm	mm	kg			
E11 VIBE 035 H		E11 VIBE 035 HB2		35	25					11	20	58	100
E11 VIBE 050 H		E11 VIBE 050 HB4		50	25					11	25	74	150

INFORD®

Stainless

E12 Stainless steel institutional casters
欧式不锈钢中轻型

50-75kg



			TPLE/超级人造胶轮(不锈钢轴套)							
Swivel caster	Rigid caster	Swivel caster with nylon total brake								
E12 TPLE 050 S	E12 TPLE 050 R	E12 TPLE 050 SB4	050	18	60X60	48/38X48/38	6.3	24	69	50
E12 TPLE 075 S	E12 TPLE 075 R	E12 TPLE 075 SB4	075	25	60X60	48/38X48/38	6.3	24.5	100	75

INFORD®

E14 Twin wheel casters
欧式中轻型双轮

60-100kg



			TPSE/高科技人造胶轮(不锈钢单滚珠轴承)							
Swivel caster	Rigid caster	Swivel caster with nylon total brake								
E12 TPSE 050 S	E12 TPSE 050 R	E12 TPSE 050 SB4	050	18	60X60	48/38X48/38	6.3	24	69	50
E12 TPSE 075 S	E12 TPSE 075 R	E12 TPSE 075 SB4	075	25	60X60	48/38X48/38	6.3	24.5	100	75

			PPLD/塑料轮(不锈钢轴套)							
Swivel caster	Rigid caster	Swivel caster with nylon total brake								
E12 PPLD 050 S	E12 PPLD 050 R	E12 PPLD 050 SB4	050	18	60X60	48/38X48/38	6.3	24	69	50
E12 PPLD 075 S	E12 PPLD 075 R	E12 PPLD 075 SB4	075	25	60X60	48/38X48/38	6.3	24.5	100	75




Bolt hole available
可选择孔顶式(Φ11)


		PPPD/塑料轮(轴套)							
Swivel caster	Swivel caster with nylon total brake								
E14 PPPD 050 S	E14 PPPD 050 SB4	050	18	60X60	48/38X48/38	6.3	25	74	60
E14 PPPD 075 S1	E14 PPPD 075 S1B4	075	25	60X60	48/38X48/38	6.3	31.5	102	100
E14 PPPD 075 S2	E14 PPPD 075 S2B4	075	25	77X67	62/50X51.5/41.5	8.5	31.5	102	100



Bolt hole available
可选择孔顶式(Φ11)



S1(60X60MM)



S2(77X67MM)

INFORD®

E15 Medium duty casters
欧式中型

100kg 



TPAJ/超灵活人造胶轮(单滚珠轴承)											
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing with thread guards											
Swivel caster	Rigid caster	Swivel caster with alloy total brake	Swivel caster with nylon total brake	∅ mm	U mm	U mm	U mm	U mm	U mm	U mm	kg
E15 TPAJ 100 S	E15 TPAJ 100 R			100	32	77X67	61.5/56X51.5X46.5	8.5	38	135	100
		E15 TPAJ 100 SB24	E15 TPAJ 100 SB4	100	32	77X67	61.5/56X51.5X46.5	8.5	43.5	135	100
E15 TPAJ 125 S	E15 TPAJ 125 R			125	32	77X67	61.5/56X51.5X46.5	8.5	40	160	100
		E15 TPAJ 125 SB24	E15 TPAJ 125 SB4	125	32	77X67	61.5/56X51.5X46.5	8.5	41	160	100

INFORD®

Stain
less

E16 Stainless steel medium duty casters
欧式不锈钢中型

100kg 



TPSJ/超灵活人造胶轮(不锈钢单滚珠轴承)											
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Stainless steel single ball bearing											
Swivel caster	Rigid caster	Swivel caster with alloy total brake	Swivel caster with nylon total brake	∅ mm	U mm	U mm	U mm	U mm	U mm	U mm	kg
E16 TPSJ 100 S	E16 TPSJ 100 R			100	32	77X67	61.5/56X51.5X46.5	8.5	38	135	100
		E16 TPSJ 100 SB24	E16 TPSJ 100 SB4	100	32	77X67	61.5/56X51.5X46.5	8.5	43.5	135	100
E16 TPSJ 125 S	E16 TPSJ 125 R			125	32	77X67	61.5/56X51.5X46.5	8.5	40	160	100
		E16 TPSJ 125 SB24	E16 TPSJ 125 SB4	125	32	77X67	61.5/56X51.5X46.5	8.5	41	160	100

TPAJ/超灵活人造胶轮(单滚珠轴承)											
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing with thread guards											
Bolt hole caster	Bolt hole caster with alloy total brake	Bolt hole caster with nylon total brake	∅ mm	U mm	kg						
E15 TPAJ 100 H			100	32			13	38	135	100	
	E15 TPAJ 100 HB24	E15 TPAJ 100 HB4	100	32			13	43.5	135	100	
E15 TPAJ 125 H			125	32			13	40	160	100	
	E15 TPAJ 125 HB24	E15 TPAJ 125 HB4	125	32			13	41	160	100	

TPSJ/超灵活人造胶轮(不锈钢单滚珠轴承)											
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Stainless steel single ball bearing											
Bolt hole caster	Bolt hole caster with alloy total brake	Bolt hole caster with nylon total brake	∅ mm	U mm	kg						
E16 TPSJ 100 H			100	32			13	38	135	100	
	E16 TPSJ 100 HB24	E16 TPSJ 100 HB4	100	32			13	43.5	135	100	
E16 TPSJ 125 H			125	32			13	40	160	100	
	E16 TPSJ 125 HB24	E16 TPSJ 125 HB4	125	32			13	41	160	100	

TPPJ/超灵活人造胶轮(轴套)											
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Plain											
Swivel caster	Rigid caster	Swivel caster with alloy total brake	Swivel caster with nylon total brake	∅ mm	U mm	U mm	U mm	U mm	U mm	U mm	kg
E15 TPPJ 100 S	E15 TPPJ 100 R			100	32	77X67	61.5/56X51.5X46.5	8.5	38	135	100
		E15 TPPJ 100 SB24	E15 TPPJ 100 SB4	100	32	77X67	61.5/56X51.5X46.5	8.5	43.5	135	100
E15 TPPJ 125 S	E15 TPPJ 125 R			125	32	77X67	61.5/56X51.5X46.5	8.5	40	160	100
		E15 TPPJ 125 SB24	E15 TPPJ 125 SB4	125	32	77X67	61.5/56X51.5X46.5	8.5	41	160	100

TPLJ/超灵活人造胶轮(不锈钢轴套)											
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Stainless steel plain											
Swivel caster	Rigid caster	Swivel caster with alloy total brake	Swivel caster with nylon total brake	∅ mm	U mm	U mm	U mm	U mm	U mm	U mm	kg
E16 TPLJ 100 S	E16 TPLJ 100 R			100	32	77X67	61.5/56X51.5X46.5	8.5	38	135	100
		E16 TPLJ 100 SB24	E16 TPLJ 100 SB4	100	32	77X67	61.5/56X51.5X46.5	8.5	43.5	135	100
E16 TPLJ 125 S	E16 TPLJ 125 R			125	32	77X67	61.5/56X51.5X46.5	8.5	40	160	100
		E16 TPLJ 125 SB24	E16 TPLJ 125 SB4	125	32	77X67	61.5/56X51.5X46.5	8.5	41	160	100

TPPJ/超灵活人造胶轮(轴套)											
<

INFORD®

D10 Apparatus twin wheel caster 全塑仪器双轮(RAL 7001)



		TPAA/超级人造胶(单滚珠轴承)									
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing											
Swivel caster	Swivel caster with kick pedal wheel brake										
D10 TPAA 075 S1	D10 TPAA 075 S1B28	75	15	55	60X60	48/38X48/38	6.3	23	76	87.5	80

		TPAA/超级人造胶(单滚珠轴承)									
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing											
Stem caster	Stem caster with kick pedal wheel brake										
D10 TPAA 075 T1	D10 TPAA 075 T1B28	75	15	55	M10X15	23	76	86	80		
D10 TPAA 075 T2	D10 TPAA 075 T2B28	75	15	55	M12X25	23	76	86	80		

		TPAA/超级人造胶(单滚珠轴承)									
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing											
Plug stem caster	Plug stem caster with kick pedal wheel brake										
D10 TPAA 075 P1	D10 TPAA 075 P1B28	75	15	55	Φ11X20	23	76	80.5	80		
D10 TPAA 075 P2	D10 TPAA 075 P2B28	75	15	55	Φ11X30	23	76	80.5	80		



TPPB
Thermoplastic rubber on polypropylene
wheel available (Plain)
可选超级人造胶轮(轴套)



UNAA
Polyurethane on nylon wheel available
(Single ball bearing)
可选尼龙芯聚氨酯轮(单滚珠轴承)



TPPB
Thermoplastic rubber on polypropylene
wheel available (Plain)
可选超级人造胶轮(轴套)



UNAA
Polyurethane on nylon wheel available
(Single ball bearing)
可选尼龙芯聚氨酯轮(单滚珠轴承)



RAL 9011
Black colour available
可选黑色



RAL 9002
White colour available
可选白色



RAL 7015
Pedal brake colour available
刹车踏板可选颜色



RAL 9011
Black colour available
可选黑色





RAL 7001
Grey colour available
可选灰色



RAL 3000
Pedal brake colour available
刹车踏板可选颜色

INFORD®

D12 Apparatus twin wheel caster 全塑仪器双轮(RAL 9002)



		TPAA/超级人造胶(单滚珠轴承)									
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing											
Swivel caster	Swivel caster with kick pedal total brake										
D12 TPAA 075 S1	D12 TPAA 075 S1B22	75	15	55	60X60	48/38X48/38	6.3	23	87.5	80	
D12 TPAA 100 S1	D12 TPAA 100 S1B22	100	15	65	60X60	48/38X48/38	6.3	32	112.5	90	

		TPAA/超级人造胶(单滚珠轴承)									
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing											
Stem caster	Stem caster with kick pedal total brake										
D12 TPAA 075 T1	D12 TPAA 075 T1B22	75	15	55	M10X15	23	86	80			
D12 TPAA 075 T2	D12 TPAA 075 T2B22	75	15	55	M12X25	23	86	80			
D12 TPAA 100 T1	D12 TPAA 100 T1B22	100	15	65	M10X15	32	111	90			
D12 TPAA 100 T2	D12 TPAA 100 T2B22	100	15	65	M12X25	32	111	90			

INFORD®

D11 Design twin wheel casters 全塑双轮

50-80kg



		UBEF/高韧性聚氨酯双轮(特尔灵轴承) 98°A								
		Tread:Polyurethane Centre:ABS Bearing:Deling								
Thread stem caster	Thread stem with nylon total brake	mm	mm	mm	mm	mm	mm	mm	mm	kg
D11 UBEF 075 T	D11 UBEF 075 TB4	75	12.5	50	M12X25		20	90.5	50	
D11 UBEF 100 T	D11 UBEF 100 TB4	100	12.5	55	M12X25		30	120.5	80	

		UBEF/高韧性聚氨酯双轮(特尔灵轴承) 98°A								
		Tread:Polyurethane Centre:ABS Bearing:Deling								
Swivel caster	Swivel caster with nylon total brake	mm	mm	mm	mm	mm	mm	mm	mm	kg
D11 UBEF 075 S	D11 UBEF 075 SB4	75	12.5	50	71X55	54.7/47.7X36	6.2	20	97	50
D11 UBEF 100 S	D11 UBEF 100 SB4	100	12.5	55	71X55	54.7/47.7X36	6.2	30	127	80

INFORD®

D13 Design casters 全塑中轻型

75kg




		XPAE/高弹人造胶轮(单轴承) 65°A±5°								
		Tread:Elastic Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing								
Bolt hole caster	Bolt hole caster with nylon total brake	mm	mm	mm	mm	mm	mm	mm	mm	kg
D13 XPAE 075 H	D13 XPAE 075 HB4	75	25	11	29	103	75			
D13 XPAE 100 H	D13 XPAE 100 HB4	100	25	11	36	128	75			

		XPPE/高弹人造胶轮(轴套) 65°A±5°								
		Tread:Elastic Thermoplastic rubber Centre:Polypropylene Bearing:Plain								
Bolt hole caster	Bolt hole caster with nylon total brake	mm	mm	mm	mm	mm	mm	mm	mm	kg
D13 XPPE 075 H	D13 XPPE 075 HB4	75	25	11	29	103	75			
D13 XPPE 100 H	D13 XPPE 100 HB4	100	25	11	36	128	75			

		XPAE/高弹人造胶轮(单轴承) 65°A±5°								
		Tread:Elastic Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing								
Stem caster	Stem caster with nylon total brake	mm	mm	mm	mm	mm	mm	mm	mm	kg
D13 XPAE 075 T	D13 XPAE 075 TB4	75	25	29	M12X25	29	112	75		
D13 XPAE 100 T	D13 XPAE 100 TB4	100	25	36	M12X25	36	137	75		

		XPPE/高弹人造胶轮(轴套) 65°A±5°								
		Tread:Elastic Thermoplastic rubber Centre:Polypropylene Bearing:Plain								
Stem caster	Stem caster with nylon total brake	mm	mm	mm	mm	mm	mm	mm	mm	kg
D13 XPPE 075 T	D13 XPPE 075 TB4	75	25	29	M12X25	29	112	75		
D13 XPPE 100 T	D13 XPPE 100 TB4	100	25	36	M12X25	36	137	75		

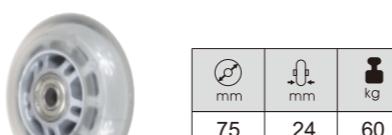

mm	mm	kg
75	24	60

UDBF




Transparent polyurethane

caster available

可选透明聚氨酯轮(双滚珠轴承)

D15 Design casters 塑架中型

100kg

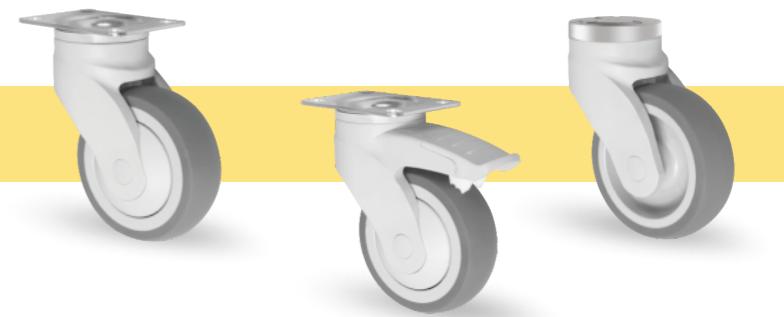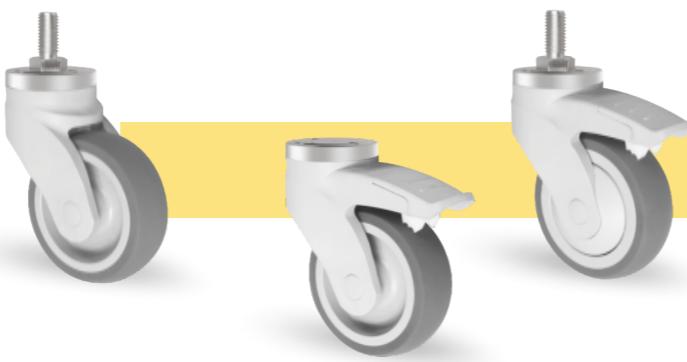

			XPAJ/高弹人造胶轮(单滚珠轴承) 65°A±5°						
		Tread:Elastic Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing with thread guards							
Bolt hole caster	Bolt hole caster with nylon total brake	mm	mm	mm	mm	mm	mm	kg	
D15 XPAJ 100 H	D15 XPAJ 100 HB4	100	32	13	36	137	8.5	100	
D15 XPAJ 125 H	D15 XPAJ 125 HB4	125	32	13	38	161	8.5	100	

			XPPJ/高弹人造胶轮(轴套) 65°A±5°						
		Tread:Elastic Thermoplastic rubber Centre:Polypropylene Bearing:Plain							
Bolt hole caster	Bolt hole caster with nylon total brake	mm	mm	mm	mm	mm	mm	kg	
D15 XPPJ 100 H	D15 XPPJ 100 HB4	100	32	13	36	137	8.5	100	
D15 XPPJ 125 H	D15 XPPJ 125 HB4	125	32	13	38	161	8.5	100	

			XPAJ/高弹人造胶轮(单滚珠轴承) 65°A±5°						
		Tread:Elastic Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing with thread guards							
Stem caster	Stem caster with nylon total brake	mm	mm	mm	mm	mm	mm	kg	
D15 XPAJ 100 T	D15 XPAJ 100 TB4	100	32	M12X25	36	146	8.5	100	
D15 XPAJ 125 T	D15 XPAJ 125 TB4	125	32	M12X25	38	170	8.5	100	


			XPPJ/高弹人造胶轮(轴套) 65°A±5°						
		Tread:Elastic Thermoplastic rubber Centre:Polypropylene Bearing:Plain							
Stem caster	Stem caster with nylon total brake	mm	mm	mm	mm	mm	mm	kg	
D15 XPPJ 100 T	D15 XPPJ 100 TB4	100	32	M12X25	36	146	8.5	100	
D15 XPPJ 125 T	D15 XPPJ 125 TB4	125	32	M12X25	38	170	8.5	100	

			XPAJ/高弹人造胶轮(单滚珠轴承) 65°A±5°						
		Tread:Elastic Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing with thread guards							
Swivel caster	Swivel caster with nylon total brake	mm	mm	mm	mm	mm	mm	kg	
D15 XPAJ 100 S1	D15 XPAJ 100 S1B4	100	32	77X67	61.5/56X51.5/46	8.5	36	137	100
D15 XPAJ 100 S2	D15 XPAJ 100 S2B4	100	32	92X64	76/70X45	8.5	36	137	100
D15 XPAJ 125 S1	D15 XPAJ 125 S1B4	125	32	77X67	61.5/56X51.5/46	8.5	38	161	100
D15 XPAJ 125 S2	D15 XPAJ 125 S2B4	125	32	92X64	76/70X45	8.5	38	161	100


			XPPJ/高弹人造胶轮(轴套) 65°A±5°						
		Tread:Elastic Thermoplastic rubber Centre:Polypropylene Bearing:Plain							
Swivel caster	Swivel caster with nylon total brake	mm	mm	mm	mm	mm	mm	kg	
D15 XPPJ 100 S1	D15 XPPJ 100 S1B4	100	32	77X67	61.5/56X51.5/46	8.5	36	137	100
D15 XPPJ 100 S2	D15 XPPJ 100 S2B4	100	32	92X64	76/70X45	8.5	36	137	100
D15 XPPJ 125 S1	D15 XPPJ 125 S1B4	125	32	77X67	61.5/56X51.5/46	8.5	38	161	100
D15 XPPJ 125 S2	D15 XPPJ 125 S2B4	125	32	92X64	76/70X45	8.5	38	161	100

TPAJ	TPPJ

Thermoplastic rubber wheel available 85°A
超灵活人造胶轮(单滚珠轴承)



S1

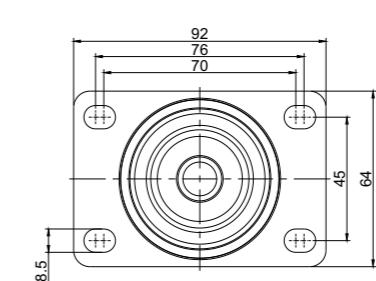


S2

			XPPJ/高弹人造胶轮(轴套) 65°A±5°						
		Tread:Elastic Thermoplastic rubber Centre:Polypropylene Bearing:Plain							
Stem caster	Stem caster with nylon total brake	mm	mm	mm	mm	mm	mm</		

INFORD® DESIGN

D22 Design casters 塑盖脚轮

100-110kg



			XPAJ / 圆边高弹性人造胶轮(单滚珠轴承) 65°A±5°							
<small>Tread:Elastic thermoplastic rubber(round) Centre:Polypropylene Bearing:Single ball bearing with thread guards</small>										
Swivel caster	Swivel caster with nylon total brake	mm	mm	mm	mm	mm	mm	mm	mm	kg
D22 XPAJ 100 S	D22 XPAJ 100 SB5	100	32	95X62	77.5/71.5X45	9	34.5	140.8	100	
D22 XPAJ 125 S	D22 XPAJ 125 SB5	125	32	95X62	77.5/71.5X45	9	32	165.3	110	

			XPAJ / 圆边高弹性人造胶轮(单滚珠轴承) 65°A±5°							
<small>Tread:Elastic thermoplastic rubber(round) Centre:Polypropylene Bearing:Single ball bearing with thread guards</small>										
Thread stem caster	Thread stem caster with nylon total brake	mm	mm	mm	mm	mm	mm	mm	mm	kg
D22 XPAJ 100 T1	D22 XPAJ 100 T1B5	100	32	M12X25			34.5	146	100	
D22 XPAJ 100 T2	D22 XPAJ 100 T2B5	100	32	M16X25			34.5	146	100	
D22 XPAJ 125 T1	D22 XPAJ 125 T1B5	125	32	M12X25			32	171	110	
D22 XPAJ 125 T2	D22 XPAJ 125 T2B5	125	32	M16X25			32	171	110	



P Round solid plug stem available

可选择圆型插杆式

INFORD®

D25 Design twin wheel caster-low height 矮款全塑双轮(RAL 9002)

90-100kg



			TPAA / 超级人造胶(单滚珠轴承)								
<small>Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing</small>											
Bolt hole caster	Bolt hole caster with one pedal brake	Bolt hole caster with two pedal brake	mm	mm	mm	mm	mm	mm	mm	kg	
D25 TPAA 075 H1	D25 TPAA 075 H1B4	D25 TPAA 075 H1B12	75	15	65	12.2	23	78	78	90	
D25 TPAA 100 H1	D25 TPAA 100 H1B4	D25 TPAA 100 H1B12	100	15	65	12.2	32	103	103	100	

			TPAA / 超级人造胶(单滚珠轴承)								
<small>Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing</small>											
Stem caster	Stem caster with one pedal brake	Stem caster with two pedal brake	mm	mm	mm	mm	mm	mm	mm	kg	
D25 TPAA 075 T	D25 TPAA 075 TB4	D25 TPAA 075 TB12	75	15	65	M12X25	23	78	88	90	
D25 TPAA 100 T	D25 TPAA 100 TB4	D25 TPAA 100 TB12	100	15	65	M12X25	32	103	113	100	



TPPB
Thermoplastic rubber on polypropylene
wheel available (Plain)
可选超级人造胶轮(轴套)



UNAA
Polyurethane on nylon wheel available
(Single ball bearing)
可选尼龙芯聚氨酯轮(单滚珠轴承)




RAL 7001
Grey colour available
可选灰色

INFORD®

D26

Design twin wheel caster with central & Directional brake-low height
矮款全塑中控双轮(RAL 9002)

100-110kg



	TPAM/超级人造胶((单滚珠轴承))
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing	
Twin wheel with central& directional brake-short stem	mm mm mm mm mm mm mm kg
D26 TPAM 100 PB16	100 20 81 32X50 32 103 103 100
D26 TPAM 125 PB16	125 20 81 32X50 40 130 130 110

TPAM/超级人造胶((单滚珠轴承))

Tread:Thermoplastic rubber
Centre:Polypropylene
Bearing:Single ball bearing



	TPAM/超级人造胶((单滚珠轴承))
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing	
Twin wheel with central& directional brake-long stem	mm mm mm mm mm mm mm kg
D26 TPAM 100 PB14	100 20 81 28X96 32 103 103 100
D26 TPAM 125 PB14	125 20 81 28X96 40 130 130 110

TPAM/超级人造胶((单滚珠轴承))

Tread:Thermoplastic rubber
Centre:Polypropylene
Bearing:Single ball bearing


UNAJ Polyurethane on nylon wheel available
可选尼龙芯聚氨酯轮(单滚珠轴承)

INFORD®

D26

Design twin wheel caster with wire total brake-low height
矮款全塑线控双轮(RAL 9002)

100-110kg



Stretched the wire
the caster turning
拉伸威亚线
脚轮转动

Loosen the wire
the caster stops running
放松威亚线
脚轮停止转动

	TPAM/超级人造胶((单滚珠轴承))
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing	
Design twin wheel caster with wire total brake-low height	mm mm mm mm mm mm mm kg
D26 TPAM 100 TB23	100 20 81 M16X20 32 103 116 100
D26 TPAM 125 TB23	125 20 81 M16X20 40 130 143 110

TPAM/超级人造胶((单滚珠轴承))

Tread:Thermoplastic rubber
Centre:Polypropylene
Bearing:Single ball bearing


UNAJ Polyurethane on nylon wheel available(Single ball bearing)
可选尼龙芯聚氨酯轮(单滚珠轴承)

INFORD®

D26

Design twin wheel caster-low height
矮款全塑双轮(RAL 9002)

100-110kg



			TPAM/超级人造胶(单滚珠轴承)
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing			
Bolt hole caster	Bolt hole caster with one pedal brake	Bolt hole caster with two pedal brake	mm mm mm mm mm mm kg
D26 TPAM 100 H1	D26 TPAM 100 H1B4	D26 TPAM 100 H1B12	100 20 81 12.5 32 103 100
D26 TPAM 125 H1	D26 TPAM 125 H1B4	D26 TPAM 125 H1B12	125 20 81 12.5 40 130 110

TPAM/超级人造胶(单滚珠轴承)

Tread:Thermoplastic rubber
Centre:Polypropylene
Bearing:Single ball bearing

			TPAM/超级人造胶(单滚珠轴承)
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing			
Stem caster	Stem caster with one pedal brake	Stem caster with two pedal brake	mm mm mm mm mm mm kg
D26 TPAM 100 T1	D26 TPAM 100 T1B4	D26 TPAM 100 T1B12	100 20 81 M12X25 32 103 112 100
D26 TPAM 125 T1	D26 TPAM 125 T1B4	D26 TPAM 125 T1B12	125 20 81 M12X25 40 130 139 110
D26 TPAM 125 T2	D26 TPAM 125 T2B4	D26 TPAM 125 T2B12	125 20 81 M16X25 40 130 139 110

TPAM/超级人造胶(单滚珠轴承)

Tread:Thermoplastic rubber
Centre:Polypropylene
Bearing:Single ball bearing

			TPAM/超级人造胶(单滚珠轴承)
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing			
Plug stem caster	Plug stem caster with one pedal brake	Plug stem caster with two pedal brake	mm mm mm mm mm mm kg
D26 TPAM 100 P	D26 TPAM 100 PB4	D26 TPAM 100 PB12	100 20 81 28X45 32 103 103 100
D26 TPAM 125 P	D26 TPAM 125 PB4	D26 TPAM 125 PB12	125 20 81 28X45 40 130 130 110

TPAM/超级人造胶(单滚珠轴承)

Tread:Thermoplastic rubber
Centre:Polypropylene
Bearing:Single ball bearing




UNAJ
Polyurethane on nylon wheel available
(Single ball bearing)
可选尼龙芯聚氨酯轮(单滚珠轴承)



RAL 7001
Grey colour available
可选灰色

INFORD®

D27 Design twin wheel-caster-high height
高款全塑双轮(RAL 9002)

100-110kg 



			TPAM/超级人造胶(单滚珠轴承)																			
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing																						
Swivel caster Swivel caster with one pedal brake Swivel caster with two pedal brake																						
D27 TPAM 100 S	D27 TPAM 100 SB4	D27 TPAM 100 SB12	100	20	81	77X67	61.5/56X51.5/46.5	8.5	32	118	123	100										
D27 TPAM 125 S	D27 TPAM 125 SB4	D27 TPAM 125 SB12	125	20	81	77X67	61.5/56X51.5/46.5	8.5	40	143	148	110										

			TPAM/超级人造胶(单滚珠轴承)																			
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing																						
Bolt hole caster Bolt hole caster with one pedal brake Bolt hole caster with two pedal brake																						
D27 TPAM 100 H	D27 TPAM 100 HB4	D27 TPAM 100 HB12	100	20	81	12.5	32	118	118	100												
D27 TPAM 125 H	D27 TPAM 125 HB4	D27 TPAM 125 HB12	125	20	81	12.5	40	143	143	110												

			TPAM/超级人造胶(单滚珠轴承)																			
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing																						
Stem caster Stem caster with one pedal brake Stem caster with two pedal brake																						
D27 TPAM 100 T	D27 TPAM 100 TB4	D27 TPAM 100 TB12	100	20	81	M12X25	32	118	127	100												
D27 TPAM 125 T	D27 TPAM 125 TB4	D27 TPAM 125 TB12	125	20	81	M12X25	40	143	152	110												


			TPAM/超级人造胶(单滚珠轴承)																			
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing																						
Plug stem caster Plug stem caster with one pedal brake Plug stem caster with two pedal brake																						
D27 TPAM 100 P	D27 TPAM 100 PB4	D27 TPAM 100 PB12	100	20	81	28X45	32	118	118	100												
D27 TPAM 125 P	D27 TPAM 125 PB4	D27 TPAM 125 PB12	125	20	81	28X45	40	143	143	110												



UNAJ Polyurethane on nylon
wheel available(Single ball bearing)
可选尼龙芯聚氨酯轮(单滚珠轴承)




RAL 7001
Grey colour available
可选灰色



INFORD®

S10 Shopping cart casters
美式中轻型购物车轮



70-80kg




UPAE/高科技聚氨酯轮 (单滚珠轴承) 98°A

Tread:Polyurethane
Centre:Polypropylene
Bearing:Single ball bearing with thread guards

Bolt hole caster	 mm	 mm	 mm	 mm	 mm	 mm	 kg
S10 UPAE 075 H	75	26	13	29	102	70	
S10 UPAE 100 H	100	26	13	33	123	80	

INFORD®

S11 Shopping cart casters
欧式孔顶购物车轮



100kg



XPAJ/圆边高弹性人造胶 (单滚珠轴承) 65°A+5°A

Tread:Elastic thermoplastic rubber(round)
Centre:Polypropylene
Bearing:Single ball bearing with thread guards

Bolt hole caster	 mm	 mm	 mm	 mm	 mm	 mm	 kg
S11 XPAJ 100 H	100	32	13	38	126	100	
S11 XPAJ 125 H	125	32	13	38	155	100	

INFORD®

S17 Shopping cart casters
美式中轻型购物车轮



120kg




UPGF/聚氨酯轮 (双滚珠轴承)

Tread:Polyurethane
Centre:Polypropylene
Bearing:Double ball bearing with thread guards

Thread stem caster	mm	mm	mm	mm	mm	mm	kg



S15 Shopping cart casters
中轻型购物车轮




100kg

		TPAJ/超灵活人造胶轮(单滚珠轴承)															
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing with thread guards																	
Bolt hole caster																	
S15 TPAJ 100 H	100	32	13	35	129	100											
S15 TPAJ 125 H	125	32	13	38	155	100											



S25 Shopping cart casters
中轻型购物车轮(铆钉款)



100kg

		TPAJ/超灵活人造胶轮(单滚珠轴承)															
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing with thread guards																	
Bolt hole caster																	
S25 TPAJ 100 H	100	32	13	35	129	100											
S25 TPAJ 125 H	125	32	13	38	155	100											

		TPPJ/超灵活人造胶轮(轴套)															
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Plain																	
Bolt hole caster																	
S15 TPPJ 100 H	100	32	13	35	129	100											
S15 TPPJ 125 H	125	32	13	38	155	100											

		TPAJ/超灵活人造胶轮(单滚珠轴承)															
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Single ball bearing with thread guards																	
Thread stem caster																	
S16 TPAJ 100 H	100	32	12	35	129	80											
S16 TPAJ 125 H	125	32	12	38	155	80											


		TPPJ/超灵活人造胶轮(轴套)															
Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Plain																	
Thread stem caster																	
S16 TPPJ 100 H	100	32	12	35	129	80											
S16 TPPJ 125 H	125	32	12	38	155	80											

Polyurethane on nylon wheel available	
尼龙芯聚氨酯轮 (单滚珠轴承)	
100	32
125	32

Elastic thermoplastic rubber wheel available 65°A±5°	
圆边高弹人造胶轮 (单滚珠轴承)	
100	32
125	32



INFORD® **S12** Shopping cart walkway casters
欧式孔顶三刀电梯轮



UUAB/特硬聚氨酯轮(单滚珠轴承)64°D

Tread: Extra hard polyurethane
Centre: Extra hard polyurethane
Bearing: Single ball bearing with thread guards

Bolt hole caster							
S12 UUAB 100 H	100	4	32	12.2	38	126.5	*
S12 UUAB 125 H	125	4	31	12.2	40	151	*

INFORD®

S28 Shopping cart casters
欧式轴承顶购物车轮



100kg




XPAJ/圆边高弹人造胶轮(单滚珠轴承)

Tread: Elastic thermoplastic rubber (round)
Centre: Polypropylene
Bearing: Single ball bearing with thread guards

Bolt hole caster							
S28 XPAJ 125 H	125	32	12.3		35	155	100

INFORD®

S28 Shopping cart walkway casters
欧式轴承顶两刀电梯轮




UNAE/尼龙芯聚氨酯轮(单滚珠轴承)

Tread: Polyurethane
Centre: Nylon
Bearing: Single ball bearing with thread guards

Bolt hole caster							
S28 UNAE 125 H	125	5	36	12.2	35	153	*

INFORD®

S28 Shopping cart walkway casters
欧式轴承顶大小刀电梯轮



TUAE/人造胶轮(滚珠轴承)

大轮: 人造胶轮(单滚珠轴承)
Tread: Thermoplastic rubber
Centre: Polypropylene
Bearing: Single ball bearing with thread guards

小轮: 聚氨酯轮(单滚珠轴承)
Tread: Polyurethane
Centre: Polypropylene
Bearing: Single ball bearing with thread guards

Bolt hole caster							
S28 TUAE 125 H	125	5/25	36	12.2	35	158	*

承载

*Load capacity

在水平地面及安全区地板上承载80kg/每脚轮

-80kg per caster on level and securely attached floors

在电梯上承载30kg/每脚轮

-30kg per caster on walkway

注意:

如果用在室外不平的地方,会影响脚轮预期的寿命


Important:

Used on uneven floors, outdoor will affect the life expectancy of caster

INFORD®

A10 Light duty casters
美式喷油中轻型

50-150kg



Swivel caster	Rigid caster	Swivel caster with nylon wheel brake								
A10 NNBB 040 S	A10 NNBB 040 R	A10 NNBB 040 SB2	040 (1.5)	25	71X55	54.7/47.7X36	6.2	26	61	100
A10 NNBB 050 S	A10 NNBB 050 R	A10 NNBB 050 SB2	050 (2)	25	71X55	54.7/47.7X36	6.2	27	70	150

NNBB/尼龙轮(双滚珠轴承)

Tread: Nylon
Centre: Nylon
Bearing: Double ball bearing

Swivel caster	Rigid caster	Swivel caster with nylon wheel brake								
A10 UPBB 040 S	A10 UPBB 040 R	A10 UPBB 040 SB2	040 (1.5)	25	71X55	54.7/47.7X36	6.2	26	61	50
A10 UPBB 050 S	A10 UPBB 050 R	A10 UPBB 050 SB2	050 (2)	25	71X55	54.7/47.7X36	6.2	27	70	60

UPBB/聚氨酯轮(双滚珠轴承)

Tread: Polyurethane
Centre: Polypropylene
Bearing: Double ball bearing

Swivel caster	Rigid caster	Swivel caster with nylon wheel brake								
A10 PPBB 040 S	A10 PPBB 040 R	A10 PPBB 040 SB2	040 (1.5)	25	71X55	54.7/47.7X36	6.2	26	61	50
A10 PPBB 050 S	A10 PPBB 050 R	A10 PPBB 050 SB2	050 (2)	25	71X55	54.7/47.7X36	6.2	27	70	60

PPBB/耐力轮(双滚珠轴承)


Tread: Polypropylene
Centre: Polypropylene
Bearing: Double ball bearing




T
Threaded stem available

可选择丝杆式

A21 Medium duty casters 美式中型

100-160kg 

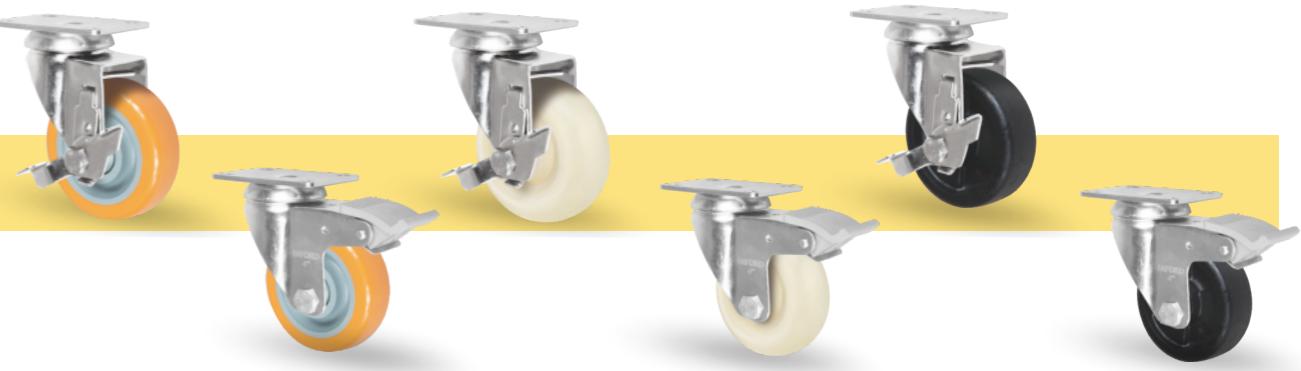

				XPBK/平边高弹人造胶轮(双滚珠轴承) 65°A±5°									
			Tread:Elastic thermoplastic rubber(flat) Centre:Polypropylene Bearing:Double ball bearing										
Swivel caster	Rigid caster	Swivel caster with nylon total brake	 mm (INCH)	 mm	 mm	 mm	 mm	 mm	 mm	 mm	 mm	 kg km/h	
A21 XPBK 075 S	A21 XPBK 075 R	A21 XPBK 075 SB4	075(3)	32	95X62	77.5/71.5X45	9	36/41.5	110	100			
A21 XPBK 100 S	A21 XPBK 100 R	A21 XPBK 100 SB4	100(4)	32	95X62	77.5/71.5X45	9	38/35.5	133	130			
A21 XPBK 125 S	A21 XPBK 125 R	A21 XPBK 125 SB4	125(5)	32	95X62	77.5/71.5X45	9	45/33	158	140			

				UPBJ/特硬聚氨酯轮(双滚珠轴承)98°A									
			Tread:Extra hard polyurethane Centre:Polypropylene Bearing:Double ball bearing										
Swivel caster	Rigid caster	Swivel caster with nylon total brake	 mm (INCH)	 mm	 mm	 mm	 mm	 mm	 mm	 mm	 mm	kg	
A21 UPBJ 075 S	A21 UPBJ 075 R	A21 UPBJ 075 SB4	075(3)	32	95X62	77.5/71.5X45	9	36/41.5	110	100			
A21 UPBJ 090 S	A21 UPBJ 090 R	A21 UPBJ 090 SB4	090(3.5)	32	95X62	77.5/71.5X45	9	36/36	119	110			
A21 UPBJ 100 S	A21 UPBJ 100 R	A21 UPBJ 100 SB4	100(4)	32	95X62	77.5/71.5X45	9	38/35.5	133	130			
A21 UPBJ 125 S	A21 UPBJ 125 R	A21 UPBJ 125 SB4	125(5)	32	95X62	77.5/71.5X45	9	45/33	158	140			

				XPAJ/圆边高弹人造胶轮(单滚珠轴承) 65°A±5°									
			Tread:Elastic Thermoplastic rubber(round) Centre:Polypropylene Bearing:Single ball bearing with thread guards										
Swivel caster	Rigid caster	Swivel caster with nylon total brake	 mm (INCH)	 mm	 mm	 mm	 mm	 mm	 mm	 mm	 mm	 kg km/h	
A21 XPAJ 075 S	A21 XPAJ 075 R	A21 XPAJ 075 SB4	075(3)	32	95X62	77.5/71.5X45	9	36/41.5	110	85			
A21 XPAJ 100 S	A21 XPAJ 100 R	A21 XPAJ 100 SB4	100(4)	32	95X62	77.5/71.5X45	9	38/35.5	133	110			
A21 XPAJ 125 S	A21 XPAJ 125 R	A21 XPAJ 125 SB4	125(5)	32	95X62	77.5/71.5X45	9	45/33	158	120			

				PPBK/美力轮(双滚珠轴承)									
			Tread:Polypropylene Centre:Polypropylene Bearing:Double ball bearing										
Swivel caster	Rigid caster	Swivel caster with nylon total brake	 mm (INCH)	 mm	 mm	 mm	 mm	 mm	 mm	 mm	 mm	kg	
A21 PPBK 075 S	A21 PPBK 075 R	A21 PPBK 075 SB4	075(3)	32	95X62	77.5/71.5X45	9	36/41.5	110	100			
A21 PPBK 090 S	A21 PPBK 090 R	A21 PPBK 090 SB4	090(3.5)	32	95X62	77.5/71.5X45	9	36/36	119	110			
A21 PPBK 100 S	A21 PPBK 100 R	A21 PPBK 100 SB4	100(4)	32	95X62	77.5/71.5X45	9	38/35.5	133	130			
A21 PPBK 125 S	A21 PPBK 125 R	A21 PPBK 125 SB4	125(5)	32	95X62	77.5/71.5X45	9	45/33	158	140			


				APAL/防静电高弹人造胶轮(单滚珠轴承)									

INFORD®



A22 Stainless steel medium duty casters 美式不锈钢中型

100-160kg




			XPDK/平边高弹性人造胶轮(不锈钢轴套+特尔灵轴承) 65°A±5°									
			Tread:Elastic thermoplastic rubber(flat) Centre:Polypropylene Bearing:Stainless steel plain/Deling									
Swivel caster	Rigid caster	Swivel caster with nylon total brake	Ø mm (INCH)	U mm	U mm	U mm	U mm	U mm	U mm	kg		
A22 XPDK 075 S	A22 XPDK 075 R	A22 XPDK 075 SB4	075(3)	32	95X67	77.5/71.5X45	9	36	109	100		
A22 XPDK 100 S	A22 XPDK 100 R	A22 XPDK 100 SB4	100(4)	32	95X67	77.5/71.5X45	9	38	132	130		
A22 XPDK 125 S	A22 XPDK 125 R	A22 XPDK 125 SB4	125(5)	32	95X67	77.5/71.5X45	9	40	157	140		

INFORD®



X22 Stainless steel transport casters 美式不锈钢通用型

100-160kg



			UPDJ /特硬聚氨酯轮(不锈钢轴套+特尔灵轴承) 98°A									
			Tread:Extra hard polyurethane Centre:Polypropylene Bearing:Stainless steel plain/Deling									
Swivel caster	Rigid caster	Swivel caster with nylon total brake	Ø mm (INCH)	U mm	U mm	U mm	U mm	U mm	U mm	kg		
A22 UPDJ 075 S	A22 UPDJ 075 R	A22 UPDJ 075 SB4	075(3)	32	95X67	77.5/71.5X45	9	36	109	100		
A22 UPDJ 100 S	A22 UPDJ 100 R	A22 UPDJ 100 SB4	100(4)	32	95X67	77.5/71.5X45	9	38	132	130		
A22 UPDJ 125 S	A22 UPDJ 125 R	A22 UPDJ 125 SB4	125(5)	32	95X67	77.5/71.5X45	9	40	157	140		

			UPDJ /特硬聚氨酯轮(不锈钢轴套+特尔灵轴承) 98°A									
			Tread:Extra hard polyurethane Centre:Polypropylene Bearing:Stainless steel plain/Deling									
Swivel caster	Rigid caster	Swivel caster with metal total brake	Ø mm (INCH)	U mm	U mm	U mm	U mm	U mm	U mm	kg		
X22 UPDJ 075 S	X22 UPDJ 075 R	X22 UPDJ 075 SB3	075(3)	32	95X70	76/70X45	8.5	36/42	103	100		
X22 UPDJ 100 S	X22 UPDJ 100 R	X22 UPDJ 100 SB3	100(4)	32	95X70	76/70X45	8.5	36/39	128	130		
X22 UPDJ 125 S	X22 UPDJ 125 R	X22 UPDJ 125 SB3	125(5)	32	95X70	76/70X45	8.5	38/39	155	140		

			PPDK /美力轮(不锈钢轴套+特尔灵轴承)									
			Tread:Polypropylene Centre:Polypropylene Bearing:Stainless steel plain/Deling									
Swivel caster	Rigid caster	Swivel caster with nylon total brake	Ø mm (INCH)	U mm	U mm	U mm	U mm	U mm	U mm	kg		
A22 PPDK 075 S	A22 PPDK 075 R	A22 PPDK 075 SB4	075(3)	32	95X67	77.5/71.5X45	9	36	109	100		
A22 PPDK 100 S	A22 PPDK 100 R	A22 PPDK 100 SB4	100(4)	32	95X67	77.5/71.5X45	9	38	132	140		
A22 PPDK 125 S	A22 PPDK 125 R	A22 PPDK 125 SB4	125(5)	32	95X67	77.5/71.5X45	9	40	157	160		

			PPDK /美力轮(不锈钢轴套+特尔灵轴承)									
			Tread:Polypropylene Centre:Polypropylene Bearing:Stainless steel plain/Deling									
Swivel caster	Rigid caster	Swivel caster with metal total brake	Ø mm (INCH)	U mm	U mm	U mm	U mm	U mm	U mm	kg		
X22 PPDK 075 S	X22 PPDK 075 R	X22 PPDK 075 SB3	075(3)	32	95X70	76/70X45	8.5	36/42	103	100		
X22 PPDK 100 S	X22 PPDK 100 R	X22 PPDK 100 SB3	100(4)	32	95X70	76/70X45	8.5	36/39	128	140		
X22 PPDK 125 S	X22 PPDK 125 R	X22 PPDK 125 SB3	125(5)	32	95X70	76/70X45	8.5	38/39	155	160		



Bolt hole available
可选择孔顶式(Φ13)



Side wheel brake available
可选择侧刹(SB1)



HI temp nylon available
耐高温尼龙轮(不锈钢轴套)230°C

Ø mm	U mm	kg
075	36	110
100	36	140
125	36	160




HI temp nylon available
耐高温尼龙轮(不锈钢轴套)230°C

Ø mm	U mm	kg
075	36	110
100	36	140
125	36	160

E21 Transport casters 欧式通用型

50-400kg

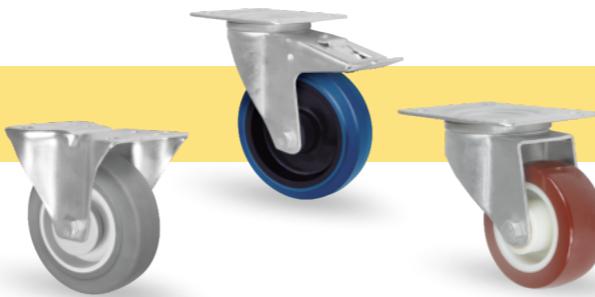

				XPAS / 平边高弹人造胶(单滚珠轴承)									
				Tread: Elastic thermoplastic rubber(flat) Center: Polypropylene XPAS bearing: Single ball bearing XPBU bearing: Double ball bearing									
Swivel caster	Rigid caster	Swivel caster with metal total brake		∅ mm	fl. mm	U mm	U mm	U mm	U mm	mm (SISB3)	mm	kg	mm
E21 XPAS 100 S	E21 XPAS 100 R	E21 XPAS 100 SB3	100	35	128	105X85	80/77X60	9	42/45	123	120	46	
E21 XPAS 125 S	E21 XPAS 125 R	E21 XPAS 125 SB3	125	40	155	105X85	80/77X60	9	39.5/43.5	123	180	46	

				XPBU/平边高弹人造胶(双滚珠轴承)									
				Tread: Elastic thermoplastic rubber(flat) Center: Polypropylene XPAS bearing: Single ball bearing XPBU bearing: Double ball bearing									
Swivel caster	Rigid caster	Swivel caster with metal total brake		∅ mm	fl. mm	U mm	U mm	U mm	U mm	mm (SISB3)	mm	kg	mm
E21 XPBU 160 S		E21 XPBU 160 SB3	160	45	200	135X105	105X80/75	11	52.5/55.5	162	200	61	
	E21 XPBU 160 R		160	45	200	135X114	105X80/75	11			200	61	
E21 XPBU 200 S		E21 XPBU 200 SB3	200	45	240	135X105	105X80/75	11	53.5/53	162	250	61	
	E21 XPBU 200 R		200	45	240	135X114	105X80/75	11			250	61	

				ENRQ/尼龙芯弹力胶轮(滚柱轴承)									
				Tread: Blue elastic rubber 70°A Centre: Nylon Bearing: Roller									
Swivel caster	Rigid caster	Swivel caster with metal total brake		∅ mm	fl. mm	U mm	U mm	U mm	U mm	mm (SISB3)	mm	kg	mm
E21 ENRQ 080 S	E21 ENRQ 080 R	E21 ENRQ 080 SB3	80	34	108	105X85	80/77X60	9	41/44	123	120	46	
E21 ENRQ 100 S	E21 ENRQ 100 R	E21 ENRQ 100 SB3	100	36	128	105X85	80/77X60	9	42/45	123	150	46	
E21 ENRQ 125 S	E21 ENRQ 125 R	E21 ENRQ 125 SB3	125	36	155	105X85	80/77X60	9	39.5/43.5	123	200	46	
E21 ENRQ 160 S		E21 ENRQ 160 SB3	160	50	200	135X105	105X80/75	11	52.5/55.5	162	300	61	
	E21 ENRQ 160 R		160	50	200	135X114	105X80/75	11			300	61	
E21 ENRQ 200 S		E21 ENRQ 200 SB3	200	50	240	135X105	105X80/75	11	53.5/53	162	400	61	
	E21 ENRQ 200 R		200	50	240	135X114	105X80/75	11			400	61	



∅ mm	fl. mm	kg
160	50	300
200	50	400

EABT

Elastic rubber on aluminum wheel available
可选择铝芯弹力胶轮 (双滚珠轴承)

				UNRM/尼龙芯红色聚氨酯轮(滚柱轴承)									
				Tread: Red polyurethane 98°A Center: Nylon Bearing: Roller bearing									
Swivel caster	Rigid caster	Swivel caster with metal total brake		∅ mm	fl. mm	U mm	U mm	U mm	U mm	mm (SISB3)	mm	kg	mm
E21 UNRM 080 S	E21 UNRM 080 R	E21 UNRM 080 SB3	080	32	108	105X85	80/77X60	9	41/44	123	150	46	
E21 UNRM 100 S	E21 UNRM 100 R	E21 UNRM 100 SB3	100	32	128	105X85	80/77X60	9	42/45	123	150	46	
E21 UNRM 125 S	E21 UNRM 125 R	E21 UNRM 125 SB3	125	32	155	105X85	80/77X60	9	39.5/43.5	123	200	46	
E21 UNRM 160 S		E21 UNRM 160 SB3	160	45	200	135X105	105X80/75	11	52.5/55.5	162	350	61	
	E21 UNRM 160 R		160	45	200	135X114	105X80/75	11			350	61	
E21 UNRM 200 S		E21 UNRM 200 SB3	200	50	240	135X105	105X80/75	11	53.5/53	162	400	61	
	E21 UNRM 200 R		200	50	240	135X114	105X80/75	11			400	61	

				PPRM/塑料轮(滚柱轴承)									
				Tread: Polypropylene Center: Polypropylene Bearing: Roller bearing									
Swivel caster	Rigid caster	Swivel caster with metal total brake		∅ mm	fl. mm	U mm	U mm	U mm	U mm	mm (SISB3)	mm	kg	mm
E21 PPRM 080 S	E21 PPRM 080 R	E21 PPRM 080 SB3	080	32	108	105X85	80/77X60	9	41/44	123	120	46	
E21 PPRM 100 S	E21 PPRM												



E22 Stainless steel transport casters 欧式不锈钢通用型



				XPSS / 平边高弹性人造胶(不锈钢单滚珠轴承) XPCU/平边高弹性人造胶(不锈钢双滚珠轴承)							
Swivel caster	Rigid caster	Swivel caster with metal total brake									
E22 XPSS 100 S		E22 XPSS 100 SB3	100	35	105X85	80/77X60	9	35/39	128	112	120
	E22 XPSS 100 R		100	35	105X87	80/77X60	9		128		120
E22 XPSS 125 S		E22 XPSS 125 SB3	125	40	105X85	80/77X60	9	38/39	155	112	180
	E22 XPSS 125 R		125	40	105X87	80/77X60	9		155		180
E22 XPCU 160 S		E22 XPCU 160 SB3	160	45	135X105	105X80/75	11	52/57	200	145	200
	E22 XPCU 160 R		160	45	135X114	105X80/75	11		200		200
E22 XPCU 200 S		E22 XPCU 200 SB3	200	45	135X105	105X80/75	11	52	240	155	250
	E22 XPCU 200 R		200	45	135X114	105X80/75	11		240		250

				UNKM/尼龙芯聚氨酯轮(不锈钢滚柱轴承)							
Tread:Polyurethane Centre:Nylon Bearing:Stainless steel roller bearing											
Swivel caster	Rigid caster	Swivel caster with metal total brake	 mm	 mm	 mm	 mm	 mm	 mm/SI/SB3	 mm	 mm	 kg
E22 UNKM 080 S		E22 UNKM 080 SB3	80	32	105X85	80/77X60	9	36/42	108	112	150
	E22 UNKM 080 R		80	32	105X87	80/77X60	9		108		150
E22 UNKM 100 S		E22 UNKM 100 SB3	100	32	105X85	80/77X60	9	35/39	128	112	150
	E22 UNKM 100 R		100	32	105X87	80/77X60	9		128		150
E22 UNKM 125 S		E22 UNKM 125 SB3	125	32	105X85	80/77X60	9	38/39	155	112	200
	E22 UNKM 125 R		125	32	105X87	80/77X60	9		155		200
E22 UNKM 160 S		E22 UNKM 160 SB3	160	45	135X105	105X80/75	11	52/57	200	145	350
	E22 UNKM 160 R		160	45	135X114	105X80/75	11		200		350
E22 UNKM 200 S		E22 UNKM 200 SB3	200	50	135X105	105X80/75	11	52	240	155	400
	E22 UNKM 200 R		200	50	135X114	105X80/75	11		240		400

				NNKM /尼龙轮(不锈钢滚柱轴承)							
				Tread:Nylon Centre:Nylon Bearing:Stainless steel roller bearing							
Swivel caster	Rigid caster	Swivel caster with metal total brake	 mm	 mm	 mm	 mm	 mm	 mm S/SB3	 mm	 mm	 kg
E22 NNMK 080 S		E22 NNMK 080 SB3	80	32	105X85	80/77X60	9	36/42	108	112	150
	E22 NNMK 080 R		80	32	105X87	80/77X60	9		108		150
E22 NNMK 100 S		E22 NNMK 100 SB3	100	32	105X85	80/77X60	9	35/39	128	112	150
	E22 NNMK 100 R		100	32	105X87	80/77X60	9		128		150
E22 NNMK 125 S		E22 NNMK 125 SB3	125	32	105X85	80/77X60	9	38/39	155	112	200
	E22 NNMK 125 R		125	32	105X87	80/77X60	9		155		200
E22 NNMK 160 S		E22 NNMK 160 SB3	160	45	135X105	105X80/75	11	52/57	200	145	350
	E22 NNMK 160 R		160	45	135X114	105X80/75	11		200		350
E22 NNMK 200 S		E22 NNMK 200 SB3	200	50	135X105	105X80/75	11	52	240	155	400
	E22 NNMK 200 R		200	50	135X114	105X80/75	11		240		400

			XPSS/平边高弹人造胶轮(不锈钢单滚珠轴承)							
			Tread: Elastic thermoplastic rubber (flat) Center: Polypropylene Bearing: Stainless steel single ball bearing							
Bolt hole caster	Bolt hole caster with metal total brake	 mm	 mm	 mm	 mm			 mm	 mm	 kg
E22 XPSS 100 H		100	35	128	13			35		120
	E22 XPSS 100 HB3	100	35	128	13			39	112	120
E22 XPSS 125 H		125	40	155	13			38		180
	E22 XPSS 125 HB3	125	40	155	13			39	112	180

			UNKM/尼龙芯聚氨酯轮(不锈钢滚柱轴承)							
		Tread:Polyurethane Centre:Nylon Bearing:Stainless steel roller bearing								
Bolt hole caster	Bolt hole caster with metal total brake	 mm	 mm	 mm	 mm			 mm	 mm	 kg
E22 UNKM 080 H		080	32	108	13			36		150
	E22 UNKM 080 HB3	080	32	108	13			42	112	150
E22 UNKM 100 H		100	32	128	13			35		150
	E22 UNKM 100 HB3	100	32	128	13			39	112	150
E22 UNKM 125 H		125	32	155	13			38		200
	E22 UNKM 125 HB3	125	32	155	13			39	112	200

			NNKM /尼龙轮(不锈钢滚柱轴承)							
			Tread:Nylon Centre:Nylon Bearing:Stainless steel roller bearing							
Bolt hole caster	Bolt hole caster with metal total brake	 mm	 mm	 mm	 mm			 mm	 mm	 kg
E22 NNKM 080 H		080	32	108	13			36		150
	E22 NNKM 080 HB3	080	32	108	13			42	112	150
E22 NNKM 100 H		100	32	128	13			35		150
	E22 NNKM 100 HB3	100	32	128	13			39	112	150
E22 NNKM 125 H		125	32	155	13			38		200
	E22 NNKM 125 HB3	125	32	155	13			39	112	200



UNLM
Stainless steel plain bearing available
可选不锈钢轴套

NNLM
Stainless steel plain bearing available
可选不锈钢轴套

E23 Transport casters 欧式大众型

50-400kg



Swivel caster	Rigid caster	Swivel caster with metal total brake	Ø mm	D mm	U mm	T mm	U mm	U mm	mm (S/SB3)	kg	mm
E23 XPAS 100 S		E23 XPAS 100 SB3	100	35	128	105X80	84/76X64/56	8.5	38/41	120	42
	E23 XPAS 100 R		100	35	128	102X87	84/76X64/56	8.5		120	42
E23 XPAS 125 S		E23 XPAS 125 SB3	125	40	155	105X80	84/76X64/56	8.5	38/41	180	52
	E23 XPAS 125 R		125	40	155	102X87	84/76X64/56	8.5		180	52

Swivel caster	Rigid caster	Swivel caster with metal total brake	Ø mm	D mm	U mm	T mm	U mm	U mm	mm (S/SB3)	kg	mm
E23 XPBU 160 S		E23 XPBU 160 SB3	160	45	195	135X110	107.5/102X82/76.5	12	54	200	61
	E23 XPBU 160 R		160	45	195	135X114	107.5/102X82/76.5	12		200	61
E23 XPBU 200 S		E23 XPBU 200 SB3	200	45	235	135X110	107.5/102X82/76.5	12	58/50	250	61
	E23 XPBU 200 R		200	45	235	135X114	107.5/102X82/76.5	12		250	61

Swivel caster	Rigid caster	Swivel caster with metal total brake	Ø mm	D mm	U mm	T mm	U mm	U mm	mm (S/SB3)	kg	mm
E23 ENRQ 080 S		E23 ENRQ 080 SB3	80	34	105	105X80	84/76X64/56	8.5	36/42	120	42
	E23 ENRQ 080 R		80	34	105	102X87	84/76X64/56	8.5		120	42
E23 ENRQ 100 S		E23 ENRQ 100 SB3	100	36	128	105X80	84/76X64/56	8.5	38/41	150	42
	E23 ENRQ 100 R		100	36	128	102X87	84/76X64/56	8.5		150	42
E23 ENRQ 125 S		E23 ENRQ 125 SB3	125	36	155	105X80	84/76X64/56	8.5	38/41	200	52
	E23 ENRQ 125 R		125	36	155	102X87	84/76X64/56	8.5		200	52
E23 ENRQ 160 S		E23 ENRQ 160 SB3	160	50	195	135X110	107.5/102X82/76.5	12	54	300	61
	E23 ENRQ 160 R		160	50	195	135X114	107.5/102X82/76.5	12		300	61
E23 ENRQ 200 S		E23 ENRQ 200 SB3	200	50	235	135X110	107.5/102X82/76.5	12	58/50	400	61
	E23 ENRQ 200 R		200	50	235	135X114	107.5/102X82/76.5	12		400	61

Swivel caster	Rigid caster	Swivel caster with metal total brake	Ø mm	D mm	U mm	T mm	U mm	U mm	mm (S/SB3)	kg	mm
E23 NNRN 080 S		E23 NNRN 080 SB3	80	32	105X80	84/76X64/56	8.5	36/42	105	150	42
	E23 NNRN 080 R		80	32	102X87	84/76X64/56	8.5		105	150	42
E23 NNRN 100 S		E23 NNRN 100 SB3	100	32	105X80	84/76X64/56	8.5	38/41	128	150	42
	E23 NNRN 100 R		100	32	102X87	84/76X64/56	8.5		128	150	42
E23 NNRN 125 S		E23 NNRN 125 SB3	125	38	105X80	84/76X64/56	8.5	38/41	155	200	52
	E23 NNRN 125 R		125	38	102X87	84/76X64/56	8.5		155	200	52
E23 NNRN 160 S		E23 NNRN 160 SB3	160	45	135X110	107.5/102X82/76.5	12	54	195	350	61
	E23 NNRN 160 R		160	45	135X114	107.5/102X82/76.5	12		195	350	61
E23 NNRN 200 S		E23 NNRN 200 SB3	200	50	135X110	107.5/102X82/76.5	12	58/50	235	400	61
	E23 NNRN 200 R		200	50	135X114	107.5/102X82/76.5	12		235	400	61

Swivel caster	Rigid caster	Swivel caster with metal total brake	Ø mm	D mm	U mm	T mm	U mm	U mm	mm (S/SB3)	kg	mm
E23 UNRM 080 S		E23 UNRM 080 SB3	80	32	105X80	84/76X64/56	8.5	36/42	105	150	42
	E23 UNRM 080 R		80	32	102X87	84/76X64/56	8.5		105	150	42
E23 UNRM 100 S		E23 UNRM 100 SB3	100	32	105X80	84/76X64/56	8.5	38/41	128	150	42
	E23 UNRM 100 R		100	32	102X87	84/76X64/56	8.5		128	150	42
E23 UNRM 125 S		E23 UNRM 125 SB3	125	32	105X80	84/76X64/56	8.5	38/41	155	200	52
	E23 UNRM 125 R		125	32	102X87	84/76X64/56	8.5		155	200	52
E23 UNRM 160 S		E23 UNRM 160 SB3	160	45	135X110	107.5/102X82/76.5	12	54	195	350	61
	E23 UNRM 160 R		160	45	135X114	107.5/102X82/76.5	12		195	350	61
E23 UNRM 200 S		E23 UNRM 200 SB3	200	50	135X110	107.5/102X82/76.5	12	58/50	235	400	61
	E23 UNRM 200 R		200	50	135X114	107.5/102X82/76.5	12		235	400	61

Swivel caster	Rigid caster	Swivel caster with metal total brake	Ø mm	D mm	U mm	T mm	U mm	U mm	mm (S/SB3)	kg	mm
E23 PPRM 080 S		E23 PPRM 080 SB3	80	32	105X80	84/76X64/56	8.5	36/42	105	150	42
	E23 PPRM 080 R		80	32	102X87	84/76X64/56	8.5		105	150	42
E23 PPRM 100 S		E23 PPRM 100 SB3	100	32	105X80	84/76X64/56	8.5	38/41	128	150	42
	E23 PPRM 100 R		100	32	102X87	84/76X64/56	8.5		128	150	42
E23 PPRM 125 S		E23 PPRM 125 SB3	125	38	105X80	84/76X64/56	8.5	38/41	155	200	52
	E23 PPRM 125 R										

INFORD®

E31/A31 Medium heavy duty casters 欧式/美式中重型

150-350kg



				XPBU / 平边高弹性人造胶轮(双滚珠轴承) 65°A±5°						
				Tread:Elastic thermoplastic rubber(flat) Centre:Polypropylene Bearing:Double ball bearing						
Swivel caster	Rigid caster	Swivel caster with metal total brake		Ø mm (INCH)	U mm	U mm	U mm	U mm	U mm	kg
E31 XPBU 100 S		E31 XPBU 100 SB3	100	40	105X85	80/77X60	9	43.5	128	150
	E31 XPBU 100 R		100	40	105X89	80/77X60	9		128	150
E31 XPBU 125 S		E31 XPBU 125 SB3	125	40	105X85	80/77X60	9	41	155	180
	E31 XPBU 125 R		125	40	105X89	80/77X60	9		155	180
A31 XPBU 100 S	A31 XPBU 100 R	A31 XPBU 100 SB3	100(4)	40	115X102	91/77.5X75.5/67	11	43.5	128	150
A31 XPBU 125 S	A31 XPBU 125 R	A31 XPBN 125 SB3	125(5)	40	115X102	91/77.5X75.5/67	11	41	155	180
A31 XPBU 150 S	A31 XPBU 150 R	A31 XPBU 150 SB3	150(6)	45	115X102	91/77.5X75.5/67	11	41	181	250

				ENAN/尼龙芯弹力胶轮(单滚珠轴承) 70°A						
				Tread:Blue elastic rubber Centre:Nylon Bearing:Single ball bearing						
Swivel caster	Rigid caster	Swivel caster with metal total brake		Ø mm (INCH)	U mm	U mm	U mm	U mm	U mm	kg
E31 ENAN 100 S		E31 ENAN 100 SB3	100	36	105X85	80/77X60	9	43.5	128	150
	E31 ENAN 100 R		100	36	105X89	80/77X60	9		128	150
E31 ENAN 125 S		E31 ENAN 125 SB3	125	36	105X85	80/77X60	9	41	155	180
	E31 ENAN 125 R		125	36	105X89	80/77X60	9		155	180
A31 ENAN 100 S	A31 ENAN 100 R	A31 ENAN 100 SB3	100(4)	36	115X102	91/77.5X75.5/67	11	43.5	128	150
A31 ENAN 125 S	A31 ENAN 125 R	A31 ENAN 125 SB3	125(5)	36	115X102	91/77.5X75.5/67	11	41	155	180

				UPBP/特硬聚氨酯轮(双滚珠轴承) 98°A						
				Tread:Extra hard polyurethane Centre:Polypropylene Bearing:Double ball bearing						
Swivel caster	Rigid caster	Swivel caster with metal total brake		Ø mm (INCH)	U mm	U mm	U mm	U mm	U mm	kg
E31 UPBP 100 S		E31 UPBP 100 SB3	100	38	105X85	80/77X60	9	43.5	128	200
	E31 UPBP 100 R		100	38	105X89	80/77X60	9		128	200
E31 UPBP 125 S		E31 UPBP 125 SB3	125	38	105X85	80/77X60	9	41	155	250
	E31 UPBP 125 R		125	38	105X89	80/77X60	9		155	250
A31 UPBP 100 S	A31 UPBP 100 R	A31 UPBP 100 SB3	100(4)	38	115X102	91/77.5X75.5/67	11	43.5	128	200
A31 UPBP 125 S	A31 UPBP 125 R	A31 UPBP 125 SB3	125(5)	38	115X102	91/77.5X75.5/67	11	41	155	250
A31 UPBP 150 S	A31 UPBP 150 R	A31 UPBP 150 SB3	150(6)	38	115X102	91/77.5X75.5/67	11	41	181	300

				PXRN/三明治塑料轮(滚柱轴承)						
				Tread:Polypropylene Centre:Thermoplastic rubber and Polypropylene Bearing:Roller						
Swivel caster	Rigid caster	Swivel caster with metal total brake		Ø mm (INCH)	U mm	U mm	U mm	U mm	U mm	kg
E31 PXRN 100 S		E31 PXRN 100 SB3	100	36	105X85	80/77X60	9	43.5	128	160
	E31 PXRN 100 R		100	36	105X89	80/77X60	9		128	160
E31 PXRN 125 S		E31 PXRN 125 SB3	125	36	105X85	80/77X60	9	41	155	200
	E31 PXRN 125 R		125	36	105X89	80/77X60	9		155	200



				NEAN/三明治尼龙轮(单滚珠轴承)						
				Tread:Nylon Centre:Elastic rubber and Nylon Bearing:Single ball bearing						
Swivel caster	Rigid caster	Swivel caster with metal total brake		Ø mm (INCH)	U mm	U mm	U mm	U mm	U mm	kg
E31 NEAN 100 S		E31 NEAN 100 SB3	100	36	105X85	80/77X60	9	43.5	128	160
	E31 NEAN 100 R		100	36	105X89	80/77X60	9		128	160
E31 NEAN 125 S		E31 NEAN 125 SB3	125	36	105X85	80/77X60	9	41	155	200
	E31 NEAN 125 R		125	36	105X89	80/77X60	9		155	200

				PPBN/塑料轮(双滚珠轴承)						
				Tread:Polypropylene Centre:Polypropylene Bearing:Double ball bearing						
Swivel caster	Rigid caster	Swivel caster with metal total brake		Ø mm (

INFORD®

E20 Industrial casters 欧式工业轮

150-200kg

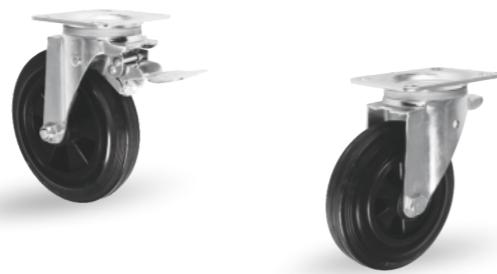


		RPRM/塑芯黑胶轮(滚柱轴承)								
		Tread:Black Rubber Centre:Polypropylene Bearing:Roller								
Swivel caster	Swivel caster with metal total brake	mm	mm	mm	mm	mm	mm	mm	kg	
E20 RPRM 160 S	E20 RPRM 160 SB10	160	50	131X107	105X84/71	11	48	200	150	
E20 RPRM 200 S	E20 RPRM 200 SB10	200	50	131X107	105X84/71	11	53	240	200	

INFORD®

E23 Swivel casters with load-dependent directional locking device (360°) 欧式复位轮

120kg



		XPBQ/蓝色高弹人造胶轮 65°A±5°								
		Tread:Elastic thermoplastic rubber Centre:Polypropylene Bearing:Double ball bearing								
Swivel caster	Swivel caster with metal total brake	mm	mm	mm	mm	mm	mm	mm	kg	
E23 XPBQ 100S +RB		100	32	105X80	84/76X64/56	8.5	38	128	120	
	E23 XPBQ 100 SB3+RB	100	32	105X80	84/76X64/56	8.5	38	128	120	



EABT
Elastic rubber on aluminum
wheel available
可选择铝芯弹力胶轮 (双滚珠轴承)

mm	mm	kg
160	50	300
200	50	400




ENRQ
Elastic rubber on
nylon wheel available
尼龙芯弹力胶轮
(滚柱轴承)
 mm mm kg
100 36 150

UNRM
Polyurethane on
nylon wheel available
尼龙芯红色聚氨
酯轮(滚柱轴承)
 mm mm kg
100 32 150


PPRM
Polypropylene
wheel available
塑料轮
(滚柱轴承)
 mm mm kg
100 32 120

NNRM
Nylon
wheel available
尼龙轮
(滚柱轴承)
 mm mm kg
100 32 150



Load-dependent direction locking devices
stop the casters turning uncontrollably.
No more uncontrolled turning when stacking
and easy to guide in a straight line.

与承载相关的方向锁定装置可以阻止脚轮不
受控制地转动。在升降运输货物和多层堆放
货物时轮子停止旋转，使其不会出现不受控
转动，易于直线引导。

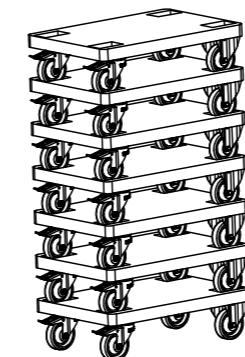

The caster stopper is briefly relieved
of load/lifted and the directional lock
jumps into the specified starting position.
This prevents uncontrolled panning by the
caster or housing.


当脚轮解除承载时，轮子跳到指定起始位
置，防止其不受控制的平移。



INFORD®

J31 Medium duty casters 日式中重型/中荷重用


kg 120-180kg



		ESBN 铁芯弹力黑胶轮(双滚珠轴承)								
		Tread:Black elastic rubber 銅板ホイールエラストマー巻車輪 Centre:Press steel ダブルボールベアリング入 Bearing:Double ball bearing								
Swivel caster 旋回式	Rigid caster 固定式	Swivel caster with side brake 旋回式ストップバー付き	Ø mm	L mm	U mm	T mm	U mm	T mm	U mm	kg
J31 ESBN 100 S		J31 ESBN 100 SB1	100	32	90X90	71/68X71/68	11	35	132	120
	J31 ESBN 100 R1		100	32	97X90	71/68X71/68	11		132	120
J31 ESBN 125 S		J31 ESBN 125 SB1	125	38	102X102	80/75X80/75	11	38	168	160
	J31 ESBN 125 R1		125	38	110X102	80/75X80/75	11		168	160
J31 ESBN 150 S		J31 ESBN 150 SB1	150	38	102X102	80/75X80/75	11	41	190	180
	J31 ESBN 150 R1		150	38	110X102	80/75X80/75	11		190	180

		VSBN 铁芯聚氨酯轮(双滚珠轴承)								
		Tread:Polyurethane 銅板ホイールウレタン巻車輪 Centre:Press steel ダブルボールベアリング入 Bearing:Double ball bearing								
Swivel caster 旋回式	Rigid caster 固定式	Swivel caster with side brake 旋回式ストップバー付き	Ø mm	L mm	U mm	T mm	U mm	T mm	U mm	kg
J31 VSBN 100 S		J31 VSBN 100 SB1	100	32	90X90	71/68X71/68	11	35	132	120
	J31 VSBN 100 R1		100	32	97X90	71/68X71/68	11		132	120
J31 VSBN 125 S		J31 VSBN 125 SB1	125	38	102X102	80/75X80/75	11	38	168	160
	J31 VSBN 125 R1		125	38	110X102	80/75X80/75	11		168	160
J31 VSBN 150 S		J31 VSBN 150 SB1	150	38	102X102	80/75X80/75	11	41	190	180
	J31 VSBN 150 R1		150	38	110X102	80/75X80/75	11		190	180

		NNBL 尼龙轮(双滚珠轴承)								
		Tread:Nylon ナイロン一体車輪 Centre:Nylon ダブルボールベアリング入 Bearing:Double ball bearing								
Swivel caster 旋回式	Rigid caster 固定式	Swivel caster with side brake 旋回式ストップバー付き	Ø mm	L mm	U mm	T mm	U mm	T mm	U mm	kg
J31 NNBL 125 S		J31 NNBL 125 SB1	125	38	102X102	80/75X80/75	11	38	168	160
	J31 NNBL 125 R1		125	38	110X102	80/75X80/75	11		168	160
J31 NNBL 150 S		J31 NNBL 150 SB1	150	38	102X102	80/75X80/75	11	41	190	180
	J31 NNBL 150 R1		150	38	110X102	80/75X80/75	11		190	180

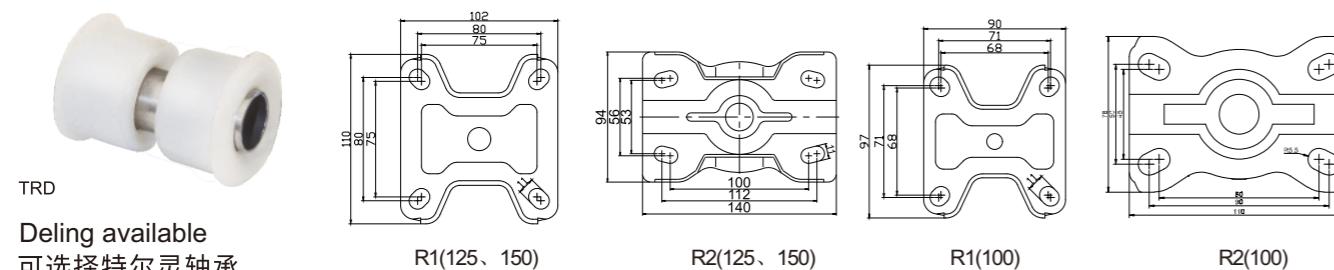


TRD
Deling available
可选择特尔灵轴承

INFORD®

J41 Japanese heavy duty casters 日式重型/重荷重用

kg 180-400kg



		VSBT/铁盒聚氨酯(双滚珠轴承)								
		Tread:Polyurethane 銅板ホイールウレタン巻車輪 Centre:Steel box ダブルボールベアリング入 Bearing:Double ball bearing								
Swivel caster 旋回式	Rigid caster 固定式	Swivel caster with metal total side brake 旋回式ストップバー付き	Ø mm	L mm	U mm	T mm	U mm	T mm	U mm	kg
J41 VSBT 100 S		J41 VSBT 100 SB8	100	32	95X95	73/68X73/68	11	31	144	180
	J41 VSBT 100 R		100	32	110X78	80X45	11		144	180
J41 VSBT 130 S		J41 VSBT 130 SB8	130	38	120X120	93/79X93/79	11	42	177	250
	J41 VSBT 130 R		130	38	140X94	112/100X56/50	11		177	250
J41 VSBT 150 S		J41 VSBT 150 SB8	150	40	120X120	93/79X93/79	11	45	198	300
	J41 VSBT 150 R		150	40	140X94	112/100X56/50	11		198	300
J41 VSBT 200 S		J41 VSBT 200 SB8	200	42	140X140	115/100X115/100	13	53	250	400
	J41 VSBT 200 R		200	42	150X105	119/112X63/56	13		250	400


		ESBT/铁盒弹力胶轮(双滚珠轴承)								
		Tread:Elastic rubber 銅板ホイールエラストマー巻車輪 Centre:Steel box ダブルペアリング入 Bearing:Double ball bearing								
Swivel caster 旋回式	Rigid caster 固定式	Swivel caster with metal total side brake 旋回式ストップバー付き	Ø mm	L mm	U mm	T mm	U mm	T mm	U mm	kg
J41 ESBT 100 S		J41 ESBT 100 SB8	100	32	95X95	73/68X73/68	11	31	144	130
	J41 ESBT 100 R		100	32	110X78	80X45	11		144	130
J41 ESBT 130 S		J41 ESBT 130 SB8	130	38	120X120	93/79X93/79	11	42	177	200
	J41 ESBT 130 R		130	38	140X94	112/100X56/50	11		177	200
J41 ESBT 150 S		J41 ESBT 150 SB8	150	40	120X120	93/79X93/79	11	45	198	250
	J41 ESBT 150 R		150	40	140X94	112/100X56/50	11		198	250
J41 ESBT 200 S		J41 ESBT 200 SB8	200	42	140X140	115/100X115/100	13</			

INFORD®



J32 Stainless steel medium heavy
日式不锈钢巨无霸/重荷重用

500-600kg




				NNCN/尼龙轮(双不锈钢滚珠轴承)								
				Tread: Nylon	Centre: Nylon							
				Bearing: Stainless steel double ball bearing								
Swivel caster	旋回式	Rigid caster	固定式	Swivel caster with nylon wheel brake	旋回式ストッパー付き	Ø mm	U mm	U mm	U mm	U mm	U mm	kg
J32 NNCN 065 S		J32 NNCN 065 SB2		65	50	100X100	80/71X80/71	11	20	95	500	
J32 NNCN 065 R		J32 NNCN 065 SB2		65	50	100X100	80/71X80/71	11		95	500	
J32 NNCN 075 S		J32 NNCN 075 SB2		75	50	100X100	80/71X80/71	11	17.5	105	600	
J32 NNCN 075 R		J32 NNCN 075 SB2		75	50	100X100	80/71X80/71	11		105	600	

INFORD®

J34 アジャスターキャスター
Medium heavy duty casters
带调节架商用机器轮

150-200kg



* Adjustable range } 065 (2½): -10mm~10mm
支撑架可调幅度 } 075 (3): -15mm~15mm
アジャスト量

				NNBP/尼龙轮(双滚珠轴承)								
				Tread: Nylon	Centre: Nylon							
				Bearing: Double ball bearing								
Swivel caster with adjustable system	旋回式	Ø mm	U mm	U mm	U mm	U mm	U mm	U mm	kg			
J34 NNBP 065 SZ		065	41	120X120	98/93X98/93	11	30	97	150			
J34 NNBP 075 SZ		075	45	120X120	98/93X98/93	11	30	102	200			



NNBP/尼龙轮(双滚珠轴承)


Tread: Nylon
Centre: Nylon
Bearing: Double ball bearing

				NNBP/尼龙轮(双滚珠轴承)								
				Tread: Nylon	Centre: Nylon							
				Bearing: Double ball bearing								
Bolt Hole caster with adjustable system	旋回式	Ø mm	U mm	U mm	U mm	U mm	U mm	U mm	kg			
J34 NNBP 065 HZ		065	41	13			30	94	150			
J34 NNBP 075 HZ		075	45	13			30	99	200			

INFORD®

J33 Medium heavy duty casters
带调节架商用机器轮

150-300kg




*Adjustable range } 050(2"): -9mm~9mm
支撑架可调幅度 } 050(2"): -9mm~9mm
アジャスト量

				NNBQ/NNBW/尼龙轮(双滚珠轴承)								
				Tread: Nylon	Centre: Nylon							
				Bearing: Double ball bearing								
Swivel caster	旋回式	Ø mm	U mm	U mm	U mm	U mm	U mm	U mm	kg			
J33 NNBQ 050 S		50	38	84X84	64/52X64/52	8.5	39	79	150			
J33 NNBW 065 S		65	38	84X84	64/52X64/52	8.5	47	90	300			

INFORD®

J35 Medium heavy duty casters
带调节架小霸王轮

250-300kg



Adjustable range } 050(2") : -8mm~8mm
支撑架可调幅度 } 065(2.5") : -10mm~10mm
アジャスト量 } 075(3") : -10mm~10mm

				NNBW/尼龙轮(双滚珠轴承)								
				Tread: Nylon	Centre: Nylon							
				Bearing: Double ball bearing								
Swivel caster	自在車	Ø mm	U mm	U mm	U mm	U mm	U mm	U mm	kg			
J35 NNBW 050 S1		50	38	82X82	64/63X64/63	9	45	79	250			
J35 NNBW 065 S1		65	38	82X82	64/63X64/63	9	50	90	250			
J35 NNBW 075 S1		75	38	82X82	64/63X64/63	9	55	100	250			
J35 NNBW 050 S2		50	38	90X90	71/63X71X63	9	45	79	250			
J35 NNBW 065 S2		65	38	90X90	71/63X71X63	11	50	90	250			
J35 NNBW 075 S2		75	38	90X90	71/63X71X63	11	55	100	250			



MMBL/浇铸尼龙轮(双滚珠轴承)

Tread: MC Nylon
Centre: MC Nylon
Bearing: Double ball bearing

				MMBL/浇铸尼龙轮(双滚珠轴承)								
				Tread: MC Nylon	Centre: MC Nylon							
				Bearing: Double ball bearing								

<tbl_r cells="4" ix="1" maxcspan

INFORD®

J36 Medium heavy duty casters
日式小霸王轮/重荷重用



			NNBW/尼龙轮(双滚珠轴承)						
Tread:Nylon Centre:Nylon Bearing: Double ball bearing	ナイロン一体車輪 ダブルボールベアリング入								
Swivel caster 自在車	Swivel caster with nylon wheel brake シングルレストップー付き	 mm	 mm	 mm	 mm	 mm	 mm (SISB2)	 mm	 kg
J36 NNBW 050 S1		50	38	82X82	64/63X64/63	9	12/12	79	300
J36 NNBW 065 S1	J36 NNBW 065 S1B2	65	38	82X82	64/63X64/63	9	14/14	90	350
J36 NNBW 075 S1	J36 NNBW 075 S1B2	75	38	82X82	64/63X64/63	9	14/12	100	400
J36 NNBW 050 S2		50	38	90X90	71/63X71/63	11	12/12	79	300
J36 NNBW 065 S2	J36 NNBW 065 S2B2	65	38	90X90	71/63X71/63	11	14/14	90	350
J36 NNBW 075 S2	J36 NNBW 075 S2B2	75	38	90X90	71/63X71/63	11	14/12	100	400

			MMBL 浇铸尼龙轮(双滚珠轴承)						
Tread:MC Nylon Centre:MC Nylon Bearing: Double ball bearing		Mcナイロン一体車輪 ダブルボールベアリング入							
Swivel caster 自在車	Swivel caster with nylon wheel brake シングルルストッパー付き	 mm	 mm	 mm	 mm	 mm	 mm (SISBZ)	 mm	 kg
J36 MMBL 050 S1		50	38	82X82	64/63X64/63	9	12/12	79	350
J36 MMBL 065 S1	J36 MMBL 065 S1B2	65	38	82X82	64/63X64/63	9	14/14	90	400
J36 MMBL 075 S1	J36 MMBL 075 S1B2	75	38	82X82	64/63X64/63	9	14/12	100	450
J36 MMBL 050 S2		50	38	90X90	71/63X71/63	11	12/12	79	350
J36 MMBL 065 S2	J36 MMBL 065 S2B2	65	38	90X90	71/63X71/63	11	14/14	90	400
J36 MMBL 075 S2	J36 MMBL 075 S2B2	75	38	90X90	71/63X71/63	11	14/12	100	450


INFORD®

J36/J48 Heavy duty twin casters 日式双轮/重荷重用


 400-600kg



		MMBU/蓝色浇铸尼龙轮(双滚珠轴承)						
		Tread:MC Nylon Centre:MC Nylon Bearing:Double ball bearing						
Swivel caster 旋回式	 mm	 mm	 mm	 mm	 mm	 mm	 mm	 kg
J36 MMBU 042 S1	42	38	82X82	64/63X64/63	9	12	75	400
J48 MMBU 057 S1	57	50	100X100	80/75X80/75	11	14	93	500
J48 MMBU 065 S1	65	50	100X100	80/75X80/75	11	14	102	600



J36(S1)



J48(S1)

INFORD®

J38 Medium heavy duty casters 日式巨无霸尼龙轮/重荷重用




Swivel caster	Rigid caster	Swivel caster with nylon wheel brake	VABM / 铝芯聚氨酯轮 (双滚珠轴承)	Tread: Polyurethane Centre: Aluminium Bearing: Double ball bearing	アルミホイールウレタン巻車輪
Swivel caster 旋回式	Rigid caster 固定式	Swivel caster with nylon wheel brake 旋回式ストッパー付き	mm mm mm mm	80/77.5X80/77.5	11 22 95 400
J38 VABM 065 S	J38 VABM 065 R	J38 VABM 065 SB2	65 48 100X100	80/77.5X80/77.5	11 22 95 400
J38 VABM 075 S	J38 VABM 075 R	J38 VABM 075 SB2	75 48 100X100	80/77.5X80/77.5	11 20 105 450
J38 VABM 075 P	J38 VABM 075 R	J38 VABM 075 SB2	75 48 100X100	80/77.5X80/77.5	11 20 105 450

			VABM / 铝芯聚氨酯轮(双滚珠轴承)						
Thread stem caster ねじ込み式	Thread stem caster with nylon wheel brake 旋回式ストッパー付き		Tread: Polyurethane Centre: Aluminium Bearing: Double ball bearing	アルミホイールウレタン車輪					
J38 VABM 065 T	J38 VABM 065 TB2	65	48	M16X30			22	104.5	360
J38 VABM 075 T	J38 VABM 075 TB2	75	48	M16X30			20	114.5	400

				NNBQ/尼龙轮(双滚珠轴承)						
Swivel caster 旋回式	Rigid caster 固定式	Swivel caster with nylon wheel brake 旋回式ストッパー付き	Tread:Nylon Centre:Nylon Bearing:Double ball bearing	ナイロン一体車輪 ダブルボールベアリング入 ダブルボールベアリング入						
J38 NNBQ 050 S	J38 NNBQ 050 R	J38 NNBQ 050 SB2	50	38	84X84	64/52X64/52	8.5	14	79	300
J38 NNBQ 065 S	J38 NNBQ 065 R	J38 NNBQ 065 SB2	65	50	100X100	80/77.5X80/77.5	11	22	95	500
J38 NNBQ 075 S	J38 NNBQ 075 R	J38 NNBQ 075 SB2	75	50	100X100	80/77.5X80/77.5	11	20	105	600

			NNBQ/尼龙轮(双滚珠轴承)						
Thread stem caster ねじ込み式	Thread stem caster with nylon wheel brake ねじ込み式メトナバー付	 mm	 mm	 mm			 mm	 mm	 kg
J38 NNBQ 050 T	J38 NNBQ 050 TB2	050	38	M16X25			14	85	300
J38 NNBQ 065 T	J38 NNBQ 065 TB2	065	50	M16X30			22	104.5	500
J38 NNBQ 075 T	J38 NNBQ 075 TB2	075	50	M16X30			20	114.5	600



European heavy top plate available

65/75mm可选择欧式中重型底板

6575mm 可选择欧式中型全底板
洋式中重型が選択できるように基板がついた

INFORD®

J46 Heavy duty casters 日式星霸轮/重荷重用

600kg



			NNBZ/黑色尼龙轮(双滚珠轴承)								
			Tread:Nylon Centre:Nylon Bearing:Double ball bearing								
J46 NNBZ 050 S			50	45	100X100	75X75/80X80	11	14	79	450	
J46 NNBZ 065 S	J46 NNBZ 065 SB29		65	45	100X100	75X75/80X80	11	14	92	600	
J46 NNBZ 065 R			65	45	104X118	75X75/80X80	11		92	600	
J46 NNBZ 075 S	J46 NNBZ 075 SB29		75	45	100X100	75X75/80X80	11	14	106	600	
J46 NNBZ 075 R			75	45	104X118	75X75/80X80	11		106	600	
			MMBZ/黑色浇铸尼龙轮(双滚珠轴承)								
			Tread:MC Nylon Centre:MC Nylon Bearing:Double ball bearing	Mcナイロン一体車輪 ダブルボールベアリング入							
J46 MMBZ 050 S			50	45	100X100	75X75/80X80	11	14	79	450	
J46 MMBZ 065 S	J46 MMBZ 065 SB29		65	48	100X100	75X75/80X80	11	14	92	600	
J46 MMBZ 065 R			65	48	104X118	75X75/80X80	11		92	600	
J46 MMBZ 075 S	J46 MMBZ 075 SB29		75	48	100X100	75X75/80X80	11	14	106	600	
J46 MMBZ 075 R			75	48	104X118	75X75/80X80	11		106	600	


INFORD®

E58 Super heavy duty casters 欧式超重型

1200-1400kg



		MMBZ/黑色浇铸尼龙轮(双滚珠轴承)								
		Tread:MC Nylon Centre:MC Nylon Bearing:Double ball bearing	Mcナイロン一体車輪 ダブルボールベアリング入							
E58 MMBZ 080 S1		80	48	100X85	80X65/60	9	20	120	1200	
E58 MMBZ 100 S2		100	48	150X110	121/59X105/80	13	20	140	1400	

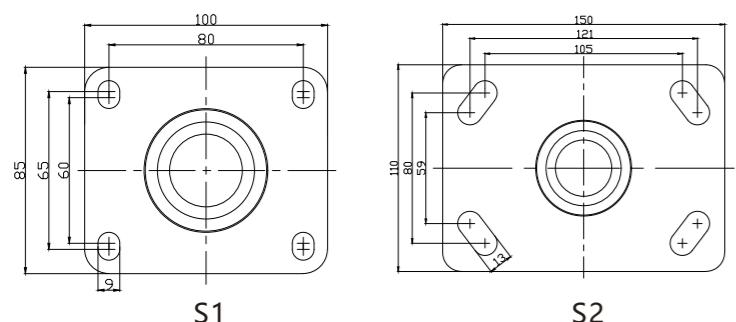

INFORD®

J48/E48 Heavy duty casters 日式/欧式超霸轮/重荷重用

600-800kg



		NNBZ/黑色尼龙轮(双滚珠轴承)								
		Tread:Nylon Centre:Nylon Bearing:Double ball bearing	ナイロン一体車輪 ダブルボールベアリング入							
J48 NNBZ 065 S		65	45	100X100	75X75/80X80	11	14	97	600	
J48 NNBZ 065 R		65	45	104X118	75X75/80X80	11		97	600	
J48 NNBZ 075 S		75	45	100X100	75X75/80X80	11	14	107	600	
J48 NNBZ 075 R		75	45	104X118	75X75/80X80	11		107	600	
E48 NNBZ 065 S		65	45	100X85	80X60/65	9	14	97	600	
E48 NNBZ 075 S		75	45	100X85	80X60/65	9	14	107	600	

		MMBZ/黑色浇铸尼龙轮(双滚珠轴承)								
		Tread:MC Nylon Centre:MC Nylon Bearing:Double ball bearing	MCナイロン一体車輪 ダブルボールベアリング入							
J48 MMBZ 065 S		65	48	100X100	75X75/80X80	11	14	97	600	
J48 MMBZ 065 R		65	48	104X118	75X75/80X80	11		97	600	
J48 MMBZ 075 S		75	48	100X100	75X75/80X80	11	14	107	700	
J48 MMBZ 100 S		100	48	100X100	75X75/80X80	11	20	140	800	
E48 MMBZ 065 S1		65	48	100X85	80X60/65	9	14	97	600	
E48 MMBZ 075 S1		75	48	100X85	80X60/65	9	14	107	700	
E48 MMBZ 080 S1		80	48	100X85	80X60/65	9	20	120	800	
E48 MMBZ 100 S1		100	48	100X85	80X60/65	9	20	140	800	
E48 MMBZ 100 S2		100	48	150X110	121/59X105/80	13		140	800	

	MMBZ/浇铸尼龙轮(双滚珠轴承)				
--	-------------------	--	--	--	--

INFORD®

A41 Heavy duty casters
美式重型

150-450kg



				XPBU/平边高弹人造胶轮(双滚珠轴承) 65°A±5°								
			Tread: Elastic thermoplastic rubber(flat) Center: Polypropylene Bearing: Double ball bearing									
Swivel caster	Rigid cater	Swivel cater with metal total brake										
A41 XPBU 100 S	A41 XPBU 100 R	A41 XPBU 100 SB6	100(4)	40	114X102	91.2/77.5X75.5/67	11.4	41	143	150		
A41 XPBU 125 S	A41 XPBU 125 R	A41 XPBU 125 SB6	125(5)	40	114X102	91.2/77.5X75.5/67	11.4	46	165	180		
A41 XPBU 150 S	A41 XPBU 150 R	A41 XPBU 150 SB6	150(6)	45	114X102	91.2/77.5X75.5/67	11.4	53	191	250		
A41 XPBU 200 S	A41 XPBU 200 R	A41 XPBU 200 SB6	200(8)	45	114X102	91.2/77.5X75.5/67	11.4	53	241	300		

				UPGW/带盖特硬聚氨酯轮(双滚珠轴承)98°A								
			Tread: Extra hard polyurethane Center: Polypropylene Bearing: Double ball bearing with thread guards									
Swivel caster	Rigid cater	Swivel cater with metal total brake										
A41 UPGW 100 S	A41 UPGW 100 R	A41 UPGW 100 SB6	100(4)	50	114X102	91.2/77.5X75.5/67	11.4	41	143	270		
A41 UPGW 125 S	A41 UPGW 125 R	A41 UPGW 125 SB6	125(5)	50	114X102	91.2/77.5X75.5/67	11.4	46	165	350		
A41 UPGW 150 S	A41 UPGW 150 R	A41 UPGW 150 SB6	150(6)	50	114X102	91.2/77.5X75.5/67	11.4	53	191	400		
A41 UPGW 200 S	A41 UPGW 200 R	A41 UPGW 200 SB6	200(8)	50	114X102	91.2/77.5X75.5/67	11.4	53	241	400		

				XPBW/超级人造胶轮(双滚珠轴承)65°A±5°								
			Tread: Thermoplastic rubber Center: Polypropylene Bearing: Double ball bearing									
Swivel caster	Rigid cater	Swivel cater with metal total brake										
A41 XPBW 100 S	A41 XPBW 100 R	A41 XPBW 100 SB6	100(4)	50	114X102	91.2/77.5X75.5/67	11.4	41	143	230		
A41 XPBW 125 S	A41 XPBW 125 R	A41 XPBW 125 SB6	125(5)	50	114X102	91.2/77.5X75.5/67	11.4	46	165	270		
A41 XPBW 150 S	A41 XPBW 150 R	A41 XPBW 150 SB6	150(6)	50	114X102	91.2/77.5X75.5/67	11.4	53	191	320		
A41 XPBW 200 S	A41 XPBW 200 R	A41 XPBW 200 SB6	200(8)	50	114X102	91.2/77.5X75.5/67	11.4	53	241	380		

				VIGV/带盖铁芯聚氨酯轮(双滚珠轴承)98°A								
			Tread: Polyurethane Center: Cast iron Bearing: Double ball bearing									
Swivel caster	Rigid cater	Swivel cater with metal total brake										
A41 VIGV 125 S	A41 VIGV 125 R	A41 VIGV 125 SB6	125(5)	50	114X102	91.2/77.5X75.5/67	11.4	46	165	350		
A41 VIGV 150 S	A41 VIGV 150 R	A41 VIGV 150 SB6	150(6)	50	114X102	91.2/77.5X75.5/67	11.4	53	191	400		
A41 VIGV 200 S	A41 VIGV 200 R	A41 VIGV 200 SB6	200(8)	50	114X102	91.2/77.5X75.5/67	11.4	53	241	450		

				XPGV/带盖防滑高弹人造胶轮(双滚珠轴承) 65°A±5°								
			Tread: Antiskid elastic thermoplastic rubber Center: Polypropylene Bearing: Double ball bearing with thread guards									
Swivel caster	Rigid cater	Swivel cater with metal total brake										
A41 XPGV 125 S	A41 XPGV 125 R	A41 XPGV 125 SB6	125(5)	50	114X102	91.2/77.5X75.5/67	11.4	46	165	180		
A41 XPGV 150 S	A41 XPGV 150 R	A41 XPGV 150 SB6	150(6)	50	114X102	91.2/77.5X75.5/67	11.4	53	191	250		
A41 XPGV 200 S	A41 XPGV 200 R	A41 XPGV 200 SB6	200(8)	50	114X102	91.2/77.5X75.5/67	11.4	53	241	300		


				NPBU/超级尼龙轮(双滚珠轴承)								
			Tread: Nylon Center: Polypropylene Bearing: Double ball bearing									

INFORD®

Stainless

A42 Stainless steel heavy duty casters 美式不锈钢重型

160-450kg



			XPDW/超级人造胶轮(双特尔灵轴承) XPCW/超级人造胶轮(双不锈钢滚珠轴承)									
			Tread: Thermoplastic rubber Center: Polypropylene XPDW Bearing:Double deling XPCW Bearing:Stainless steel double ball bearing									
Swivel caster	Rigid caster	Swivel caster with metal total brake	∅ mm (INCH)	Width mm	Height mm	Front height mm	Side height mm	Front side height mm	Side side height mm	kg		
A42 XPDW 100 S	A42 XPDW 100 R	A42 XPDW 100 SB6	100(4)	50	115X100	92/76X76/67	11	37	144	230		
A42 XPCW 100 S	A42 XPCW 100 R	A42 XPCW 100 SB6	100(4)	50	115X100	92/76X76/67	11	37	144	230		
A42 XPDW 125 S	A42 XPDW 125 R	A42 XPDW 125 SB6	125(5)	50	115X100	92/76X76/67	11	40	165	270		
A42 XPCW 125 S	A42 XPCW 125 R	A42 XPCW 125 SB6	125(5)	50	115X100	92/76X76/67	11	40	165	270		
A42 XPDW 150 S	A42 XPDW 150 R	A42 XPDW 150 SB6	150(6)	50	115X100	92/76X76/67	11	49	191	320		
A42 XPCW 150 S	A42 XPCW 150 R	A42 XPCW 150 SB6	150(6)	50	115X100	92/76X76/67	11	49	191	320		
A42 XPDW 200 S	A42 XPDW 200 R	A42 XPDW 200 SB6	200(8)	50	115X100	92/76X76/67	11	63	241	380		
A42 XPCW 200 S	A42 XPCW 200 R	A42 XPCW 200 SB6	200(8)	50	115X100	92/76X76/67	11	63	241	380		

			UPDW/特硬聚氨酯轮(双特尔灵轴承) UPCW/特硬聚氨酯轮(双不锈钢滚珠轴承)									
			Tread: Extra hard polyurethane Center: Polypropylene UPDW Bearing:Double deling UPCW Bearing:Stainless steel double ball bearing									
Swivel caster	Rigid caster	Swivel caster with metal total brake	∅ mm (INCH)	Width mm	Height mm	Front height mm	Side height mm	Front side height mm	Side side height mm	kg		
A42 UPDW 100 S	A42 UPDW 100 R	A42 UPDW 100 SB6	100(4)	50	115X100	92/76X76/67	11	37	144	270		
A42 UPCW 100 S	A42 UPCW 100 R	A42 UPCW 100 SB6	100(4)	50	115X100	92/76X76/67	11	37	144	270		
A42 UPDW 125 S	A42 UPDW 125 R	A42 UPDW 125 SB6	125(5)	50	115X100	92/76X76/67	11	40	165	350		
A42 UPCW 125 S	A42 UPCW 125 R	A42 UPCW 125 SB6	125(5)	50	115X100	92/76X76/67	11	40	165	350		
A42 UPDW 150 S	A42 UPDW 150 R	A42 UPDW 150 SB6	150(6)	50	115X100	92/76X76/67	11	49	191	400		
A42 UPCW 150 S	A42 UPCW 150 R	A42 UPCW 150 SB6	150(6)	50	115X100	92/76X76/67	11	49	191	400		
A42 UPDW 200 S	A42 UPDW 200 R	A42 UPDW 200 SB6	200(8)	50	115X100	92/76X76/67	11	63	241	400		
A42 UPCW 200 S	A42 UPCW 200 R	A42 UPCW 200 SB6	200(8)	50	115X100	92/76X76/67	11	63	241	400		

			NPDU/超级尼龙轮(双特尔灵轴承) NPCU/超级尼龙轮(双不锈钢滚珠轴承)									
			Tread: Nylon Center:Polypropylene NPDU Bearing:Double deling NPCU Bearing:Stainless steel double ball bearing									
Swivel caster	Rigid caster	Swivel caster with metal total brake	∅ mm (INCH)	Width mm	Height mm	Front height mm	Side height mm	Front side height mm	Side side height mm	kg		
A42 NPDU 100 S	A42 NPDU 100 R	A42 NPDU 100 SB6	100(4)	50	115X100	92/76X76/67	11	37	144	300		
A42 NPCU 100 S	A42 NPCU 100 R	A42 NPCU 100 SB6	100(4)	50	115X100	92/76X76/67	11	37	144	300		
A42 NPDU 125 S	A42 NPDU 125 R	A42 NPDU 125 SB6	125(5)	50	115X100	92/76X76/67	11	40	165	380		
A42 NPCU 125 S	A42 NPCU 125 R	A42 NPCU 125 SB6	125(5)	50	115X100	92/76X76/67	11	40	165	380		
A42 NPDU 150 S	A42 NPDU 150 R	A42 NPDU 150 SB6	150(6)	50	115X100	92/76X76/67	11	49	191	450		
A42 NPCU 150 S	A42 NPCU 150 R	A42 NPCU 150 SB6	150(6)	50	115X100	92/76X76/67	11	49	191	450		
A42 NPDU 200 S	A42 NPDU 200 R	A42 NPDU 200 SB6	200(8)	50	115X100	92/76X76/67	11	63	241	450		
A42 NPCU 200 S	A42 NPCU 200 R	A42 NPCU 200 SB6	200(8)	50	115X100	92/76X76/67	11	63	241	450		




Side brake available
可选择侧刹

INFORD®

A37 Medium heavy duty casters 美式大力士尼龙轮

300-400kg



			NNBP/尼龙轮(双滚珠轴承)									
			Tread: Nylon Center: Nylon Bearing: Double ball bearing									
Swivel caster	Rigid caster		∅ mm (INCH)	Width mm	Height mm	Front height mm	Side height mm	Front side height mm	Side side height mm	kg		
A37 NNBP 065 S	A37 NNBP 065 R	065(2.5)	41	110X85	85X60	9	24.5	100	300			
A37 NNBP 075 S	A37 NNBP 075 R	075(3)	45	110X85	85X60	9	24.5	105	400			

			QSBU/充气轮(双滚珠轴承)		
--	--	--	-----------------	--	--

INFORD®

E33 Scaffold casters
欧式脚手架(鹰架)轮


200-300kg



INFORD®

A55 Shock absorb casters
美式超重型防震轮


280-500kg




UNBW/尼龙芯聚氨酯轮(双滚珠轴承)							
	Tread:Polyurethane Centre:Nylon Bearing:Double ball bearing						
Plug stem caster with total brake	Ø mm	U mm	W mm	H mm	Swivel	活动 kg	制动 kg
E33 UNBW 125 PB	125	38	27X100	29.5	157	200	600
E33 UNBW 150 PB	150	38	27X100	29.5	180	250	750
E33 UNBW 200 PB	200	50	27X100	44.5	243	300	900

NNBM /尼龙轮(双滚珠轴承)							
	Tread:Nylon Centre:Nylon Bearing:Double ball bearing						
Plug stem caster with total brake	Ø mm	U mm	W mm	H mm	Swivel	活动 kg	制动 kg
E33 NNB M 200 PB	200	50	27X100	44.5	243	300	900

TPBV/高科技人造胶轮(双滚珠轴承)							
	Tread:Thermoplastic rubber Centre:Polypropylene Bearing:Double ball bearing						
Plug stem caster with total brake	Ø mm	U mm	W mm	H mm	Swivel	活动 kg	制动 kg
E33 TPBV 125 PB	125	38	27X100	29.5	157	200	600
E33 TPBV 150 PB	150	38	27X100	29.5	180	250	750
E33 TPBV 200 PB	200	50	27X100	44.5	243	300	900



Swivel
活动状态
Dynamic loading(2km/h):300kgs
活动状态2km/h行走承载为:300KG



Rigid&Total Brake
固定&刹掣状态
Static loading:900kgs
刹掣状态承载为:900KG



Long thread stem available
可选择长螺杆




Plug stem size available
可选择插杆尺寸

- 1.Ø27x100mm
- 2.Ø38x60mm
- 3.Ø35x100mm

INFORD®

A55 Shock absorb casters
美式超重型防震轮

280-500kg



VIGV/带盖铁芯聚氨酯(双滚珠轴承)							
	Tread: Polyurethane Center: Cast iron Bearing: Double ball bearing with thread guards						
Swivel caster	Rigid caster	Swivel caster with metal wheel brake	Ø mm	U mm	W mm	H mm	Ø mm
A55 VIGV 125 S	A55 VIGV 125 R	A55 VIGV 125 SB7	125	50	158X114	133/125X86/62	14
A55 VIGV 150 S	A55 VIGV 150 R	A55 VIGV 150 SB7	150	50	158X114	133/125X86/62	14
A55 VIGV 200 S	A55 VIGV 200 R	A55 VIGV 200 SB7	200	50	158X114	133/125X86/62	14
							60 kg km/h
							4 kg km/h

- A. 持续使用超过45分钟,载重减少25%
B. 时速在6~10公里,载重减少20%
C. 时速在10~16公里,载重减少30%

- A. Keeping use more than 45 minutes,load reduse 25%
B. in 6~10km/h, load reduse 20%
C. in 10~16km/h, load reduse 30%

注:



Lengthways double spring
双纵向弹簧



E50 Super heavy duty casters 欧式顶重型



				VABT/加厚铝芯聚氨酯轮(双滚珠轴承)
				Tread:Polyurethane Centre:Aluminium Bearing:Double ball bearing
Swivel caster	Rigid caster	Swivel caster with metal total brake	mm	mm
E50 VABT 125 S	E50 VABT 125 R	E50 VABT 125 SB3	125	50
E50 VABT 160 S	E50 VABT 160 R	E50 VABT 160 SB3	160	50
E50 VABT 200 S	E50 VABT 200 R	E50 VABT 200 SB3	200	50
			137X105	105X80/75
			mm	mm
			11	11
			60	58
			kg	kg
			km/h	km/h
			4	6
			kg	kg
			km/h	km/h



E51 Super heavy duty casters
欧式超重型



				VABT/加厚铝芯聚氨酯轮(双滚珠轴承)
Swivel caster	Rigid caster	Swivel caster with metal total brake	 mm  mm  mm  mm  mm  mm  mm  mm  mm	Tread:Polyurethane Centre:Aluminium Bearing:Double ball bearing
E51 VABT 125 S	E51 VABT 125 R	E51 VABT 125 SB6	125	50 140X110 111/98X84/71.5 11 42 185 450 360
E51 VABT 160 S	E51 VABT 160 R	E51 VABT 160 SB6	160	50 140X110 111/98X84/71.5 11 47 210 600 480
E51 VABT 200 S	E51 VABT 200 R	E51 VABT 200 SB6	200	50 140X110 111/98X84/71.5 11 53 255 800 640



UNBT/加厚尼龙芯聚氨酯轮(双滚珠轴承)

Tread:Polyurethane
Centre:Nylon
Bearing:Double ball bearing

Swivel caster	Rigid caster	Swivel caster with metal total brake	 mm	 mm	 mm	 mm	 mm	 mm	 mm	 mm	 kg	 km/h	 kg	 km/h	
E50 UNBT 125 S	E50 UNBT 125 R	E50 UNBT 125 SB3	125	50	137X105	105X80/75	11	60	163	400	320				
E50 UNBT 160 S	E50 UNBT 160 R	E50 UNBT 160 SB3	160	50	137X105	105X80/75	11	58	200	500	400				
E50 UNBT 200 S	E50 UNBT 200 R	E50 UNBT 200 SB3	200	50	137X105	105X80/75	11	58	240	600	480				



VIBU/加厚铁芯聚氨酯轮(双滚珠轴承)

Tread:Polyurethane
Centre:Cast iron
Bearing:Double ball bearing

				NNBX/加厚尼龙轮(双滚珠轴承)								
Swivel caster	Rigid caster	Swivel caster with metal total brake	 mm	 mm	 mm	 mm	 mm	 mm	 mm	 mm	 4 km/h	 6 km/h
E50 NNBX 125 S	E50 NNBX 125 R	E50 NNBX 125 SB3	125	50	137X105	105X80/75	11	60	163	500	400	
E50 NNBX 160 S	E50 NNBX 160 R	E50 NNBX 160 SB3	160	50	137X105	105X80/75	11	58	200	600	480	
E50 NNBX 200 S	E50 NNBX 200 R	E50 NNBX 200 SB3	200	50	137X105	105X80/75	11	58	240	600	480	



NNBX/加厚尼龙轮(双滚珠轴承)

Tread:Nylon
Centre:Nylon
Bearing:Double ball bearing

			
Swivel caster	Rigid caster	Swivel caster with metal total brake	Tread:Nylon Centre:Nylon Bearing:Double ball bearing
E50 NNBX 125 S	E50 NNBX 125 R	E50 NNBX 125 SB3	mm
E50 NNBX 160 S	E50 NNBX 160 R	E50 NNBX 160 SB3	mm
E50 NNBX 200 S	E50 NNBX 200 R	E50 NNBX 200 SB3	mm
			kg km/h
			kg km/h

INFORD®

E60 Super heavy duty casters
欧式耐重型

400-1000kg



VIBU/加厚铁芯聚氨酯(双滚珠轴承)											
Tread:Polyurethane Centre:Cast iron Bearing:Double ball bearing											
Swivel caster	Rigid caster	Swivel caster with metal total brake	∅ mm	Dia mm	Width mm	Dia mm	Width mm	Dia mm	Width mm	Dia mm	Width mm
E60 VIBU 125 S	E60 VIBU 125 R	E60 VIBU 125 SB10	125	50	135X110	105X81/75	12.5	50	170	500	400
E60 VIBU 150 S	E60 VIBU 150 R	E60 VIBU 150 SB10	150	50	135X110	105X81/75	12.5	50	200	600	480
E60 VIBU 160 S	E60 VIBU 160 R	E60 VIBU 160 SB10	160	50	135X110	105X81/75	12.5	50	205	700	560
E60 VIBU 200 S	E60 VIBU 200 R	E60 VIBU 200 SB10	200	50	135X110	105X81/75	12.5	56	245	1000	800
E60 VIBU 250 S	E60 VIBU 250 R	E60 VIBU 250 SB10	250	50	135X110	105X81/75	12.5	67	300	1000	800

INFORD®

A71 Kingpinless extra heavy duty casters
美式抗冲击特重型

1200-2000kg



VIBZ/加宽铁芯聚氨酯轮(双滚珠轴承)											
Tread:Polyurethane Centre:Cast iron Bearing:Double ball bearing											
Swivel caster	∅ mm (INCH)	Dia mm	Width mm	Dia mm	Width mm	Dia mm	Width mm	Dia mm	Width mm	Dia mm	Width mm
A71 VIBZ 200 S	203(8")	75	184X140	156/133X105/86	14.2	57	259	1500	1200		
A71 VIBZ 250 S	254(10")	75	184X140	156/133X105/86	14.2	62	301	1800	1440		
A71 VIBZ 300 S	305(12")	75	184X140	156/133X105/86	14.2	75	350	2000	1600		

NNBX/加厚尼龙轮(双滚珠轴承)											
Tread:Nylon Centre:Nylon Bearing:Double ball bearing											
Swivel caster	Rigid caster	Swivel caster with metal total brake	∅ mm	Dia mm	Width mm	Dia mm	Width mm	Dia mm	Width mm	Dia mm	Width mm
E60 NNBX 125 S	E60 NNBX 125 R	E60 MMBT 125 SB10	125	50	135X110	105X81/75	12.5	50	170	500	400
E60 NNBX 150 S	E60 NNBX 150 R	E60 MMBT 150 SB10	150	50	135X110	105X81/75	12.5	50	200	600	480
E60 NNBX 200 S	E60 NNBX 200 R	E60 MMBT 200 SB10	200	50	135X110	105X81/75	12.5	56	245	800	640

VIBZ/加宽铁芯聚氨酯轮(双滚珠轴承)												
Tread:Polyurethane Centre:Cast iron Bearing:Double ball bearing												
Rigid caster	∅ mm (INCH)	Dia mm	Width mm	Dia mm	Width mm	Dia mm	Width mm	Dia mm	Width mm	Dia mm	Width mm	
A71 VIBZ 200 R	203(8")	75	184X140	156/133X105/86	14.2					259	1500	1200
A71 VIBZ 250 R	254(10")	75	184X140	156/133X105/86	14.2					301	1800	1440
A71 VIBZ 300 R	305(12")	75	184X140	156/133X105/86	14.2					350	2000	1600

INFORD®

E61 Super heavy duty casters
欧式耐重型

400-1500kg



VIBU / 加厚铁芯聚氨酯轮 (双滚珠轴承)											
Tread:Polyurethane Centre:Cast iron Bearing:Double ball bearing											
Swivel caster	Rigid caster	Swivel caster with metal total brake									
Diameter mm	Bearing width mm	Swing angle °	Swing angle °	Swing angle °	Swing angle °	Swing angle °	Load capacity kg km/h	Load capacity kg km/h			
E61 VIBU 125 S	E61 VIBU 125 R	E61 VIBU 125 SB9	125	50	140X110	105X80/75	11	50	170	500	400
E61 VIBU 160 S	E61 VIBU 160 R	E61 VIBU 160 SB9	160	50	140X110	105X80/75	11	62	205	700	560
E61 VIBU 200 S	E61 VIBU 200 R	E61 VIBU 200 SB9	200	50	140X110	105X80/75	11	67	245	1000	800

INFORD®

E71 Extra heavy duty casters
欧式特重型

1500-3000kg



MMBX / 浇铸尼龙轮 (双滚珠轴承)			
Tread:MC Nylon Centre:MC Nylon Bearing:Double ball bearing			
Swivel caster	Rigid caster	Swivel caster with metal total brake	
Diameter mm	Bearing width mm	Swing angle °	Swing angle °
E71 MMBX 150 S	E71 MMBX 150 R	E71 MMBX 150 SB9	150
E71 MMBX 200 S	E71 MMBX 200 R	E71 MMBX 200 SB9	200
E71 MMBX 250 S	E71 MMBX 250 R	E71 MMBX 250 SB9	250
			55
			175X140
			140X105
			14
			51
			218
			2500
			2000
			61
			255
			3000
			2400
			71
			305
			3000
			2400
			kg km/h
			kg km/h

MMBX / 浇铸尼龙轮 (双滚珠轴承)			
Tread:MC Nylon Centre:MC Nylon Bearing:Double ball bearing			
Swivel caster	Rigid caster	Swivel caster with metal total brake	
Diameter mm	Bearing width mm	Swing angle °	Swing angle °
E61 MMBX 125 S	E61 MMBX 125 R	E61 MMBX 125 SB9	125
E61 MMBX 150 S	E61 MMBX 150 R	E61 MMBX 150 SB9	150
E61 MMBX 200 S	E61 MMBX 200 R	E61 MMBX 200 SB9	200
			55
			140X110
			105X80/75
			11
			50
			170
			1500
			1200
			kg km/h
			kg km/h

VIBZ / 加宽铁芯聚氨酯轮 (双滚珠轴承)			
Tread:Polyurethane Centre:Cast iron Bearing:Double ball bearing			
Swivel caster	Rigid caster	Swivel caster with metal total brake	
Diameter mm	Bearing width mm	Swing angle °	Swing angle °
E71 VIBZ 200 S	E71 VIBZ 200 R	E71 VIBZ 200 SB9	203
E71 VIBZ 250 S	E71 VIBZ 250 R	E71 VIBZ 250 SB9	254
E71 VIBZ 300 S	E71 VIBZ 300 R	E71 VIBZ 300 SB9	305
			75
			175X140
			140X105
			14
			61
			255
			1500
			1000
			71
			305
			1800
			1300
			87
			355
			2000
			1500
			kg km/h
			kg km/h



Directional brake available(DL)
可选方向刹


注:
使用尼龙轮的支架叉宽:72mm
使用铁芯PU的支架叉宽:92mm

Fork width for Nylon wheel:72mm
Fork width for PU wheel:92mm

INFORD®

E64 Super heavy duty twin casters 欧式耐重型双轮

800-1200kg

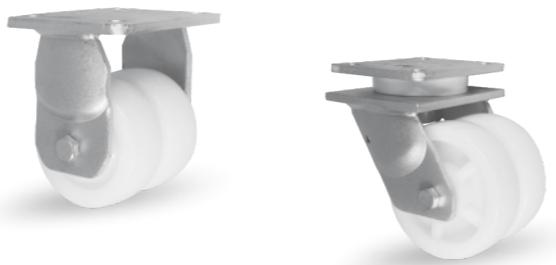

		NNBL/尼龙轮(双滚珠轴承)									
		Tread:Nylon Centre:Nylon Bearing:Double ball bearing									
Swivel caster	Rigid caster	mm	mm	mm	mm	mm	mm	mm	mm	kg	
E64 NNBL 100 S		100	38	110X140	80/75X105	11	45	145	800		
	E64 NNBL 100 R	100	38	110X140	80/75X105	11		145	800		
E64 NNBL 125 S		125	38	110X140	80/75X105	11	50	170	1200		
	E64 NNBL 125 R	125	38	110X140	80/75X105	11		170	1200		

INFORD®

E74 Extra heavy duty twin casters 欧式特重型双轮

1350-3000kg



		NNBX/加厚尼龙轮(双滚珠轴承)									
		Tread:Nylon Centre:Nylon Bearing:Double ball bearing									
Swivel caster	Rigid caster	mm	mm	mm	mm	mm	mm	mm	mm	kg	
E74 NNBX 150 S		150	50	140X175	105X140	14	55	215	1450		
	E74 NNBX 150 R	150	50	140X175	105X140	14		215	1450		
E74 NNBX 160 S		160	50	140X175	105X140	14	55	220	1550		
	E74 NNBX 160 R	160	50	140X175	105X140	14		220	1550		
E74 NNBX 200 S		200	50	140X175	105X140	14	60	260	2700		
	E74 NNBX 200 R	200	50	140X175	105X140	14		260	2700		

		MMBW/浇铸尼龙轮(双滚珠轴承)									
		Tread:MC Nylon Centre:MC Nylon Bearing:Double ball bearing									
Swivel caster	Rigid caster	mm	mm	mm	mm	mm	mm	mm	mm	kg	
E64 MMBW 080 S		80	38	110X140	80/75X105	11	45	125	600		
	E64 MMBW 080 R	80	38	110X140	80/75X105	11		125	600		
E64 MMBW 100 S		100	38	110X140	80/75X105	11	45	145	800		
	E64 MMBW 100 R	100	38	110X140	80/75X105	11		145	800		
E64 MMBW 125 S		125	38	110X140	80/75X105	11	50	170	1200		
	E64 MMBW 125 R	125	38	110X140	80/75X105	11		170	1200		

		MMBX/浇铸尼龙轮(双滚珠轴承)									
		Tread:MC Nylon Centre:MC Nylon Bearing:Double ball bearing									
Swivel caster	Rigid caster	mm	mm	mm	mm	mm	mm	mm	mm	kg	
E74 MMBX 150 S		150	55	140X175	105X140	14	55	215	2700		
	E74 MMBX 150 R	150	55	140X175	105X140	14		215	2700		
E74 MMBX 200 S		200	55	140X175	105X140	14	60	260	3000		
	E74 MMBX 200 R	200	55	140X175	105X140	14		260	3000		

		VIBU/铁芯聚氨酯轮(双滚珠轴承)									
		Tread:Polyurethane Centre:Cast iron Bearing:Double ball bearing									
Swivel caster	Rigid caster	mm	mm	mm	mm	mm	mm	mm	mm	kg	
E74 VIBU 150 S		150	50	140X175	105X140	14	55	215	1350		
	E74 VIBU 150 R	150	50	140X175	105X140	14		215	1350		
E74 VIBU 160 S		160	50	140X175	105X140	14	55	220	1450		
	E74 VIBU 160 R	160	50	140X175	105X140	14		220	1450		
E74 VIBU 200 S		200	50	140X175	105X140	14	60	260	1800		
	E74 VIBU 200 R	200	50	140X175	105X140	14		260	1800		

INFORD®

K38 Leveling casters
韩式水平调节轮

100-1500kg



NNPI/尼龙轮(轴套)

Tread: Nylon
Centre: Nylon
Bearing: Plain bearing


Swivel caster 活动型号	wheel diam 轮径 (mm)	wheel width 轮宽 (mm)	overall height 安装高度 H (mm)	adjustment range 调节范围 T (mm)	bolt hole size 孔顶尺寸 (mm)	top plate size 底板尺寸 (mm)	installation size 安装尺寸 (mm)	bolt hole size 安装孔径 (mm)	offset 偏心距 (mm)	single caster load 单个负载 (kg)	total maximum load 四个负载 (kg)
K38 NNPI 040 S	40	19.2	75	8		55X55	42X42	7	31	50	50x2
K38 NNPI 050 S	50	24	85	10		73X73	58X58	7	38	250	250x2
K38 NNPI 062 S	62	30.7	110	12		90X90	70X70	9	44	500	500x2
K38 NNPI 075 S	75	32	120	12		95X95	70X70	11	53	750	750x2



NNPI/尼龙轮(轴套)

Tread: Nylon
Centre: Nylon
Bearing: Plain bearing

Bolt hole caster 孔顶型号	wheel diam 轮径 (mm)	wheel width 轮宽 (mm)	overall height 安装高度 H (mm)	adjustment range 调节范围 T (mm)	bolt hole size 孔顶尺寸 (mm)	top plate size 底板尺寸 (mm)	installation size 安装尺寸 (mm)	bolt hole size 安装孔径 (mm)	offset 偏心距 (mm)	single caster load 单个负载 (kg)	total maximum load 四个负载 (kg)
K38 NNPI 040 H	40	19.2	75	8	M8				31	50	50x2
K38 NNPI 050 H	50	24	85	10	M12				38	250	250x2
K38 NNPI 062 H	62	30.7	110	12	M14				44	500	500x2
K38 NNPI 075 H	75	32	120	12	M14				53	750	750x2

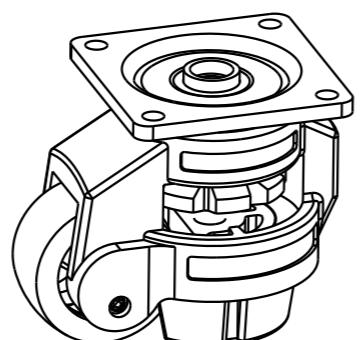

在下列检验条件下确定载重能力：

速度：最大为1km/h

温度：+15°C至+30°C

硬的水平地面，没有障碍物

行走距离：每次最长行走52m，需要15分钟的冷却暂停时间。

Test conditions for load capacity

Speed: max.1km/h

on a hard and flat ground without obstacles

Running distance: a 15min cooling time is needed after running for 52m

INFORD®

JPT Japanese plastic hand truck
日式塑板手推车



Item No. 型号	Load capacity 承重(kg)	Platform size 车板尺寸(mm)	Platform height 车板高度(mm)	Handle height 扶手高度(mm)	N.W 自重(kg)	Wheel diam 脚轮直径(mm)
JPT 150 F	150	720X460	144.5	863	9.7	100
JPT 300 F	300	905X600	215	865	17	130

INFORD® 70kg

J21 Japanese plastic hand truck casters
手推车用脚轮



Swivel caster	Rigid caster										
J21 XPAR 100 S		100	30	100X58	82X40	9	32	122	70		
	J21 XPAR 100 R	100	30	100X58	82X40	9	32	122	70		

Wheel: XPAR 圆边高弹轮(单滚珠轴承)65°A±5°

Tread:Elastic thermoplastic rubber(round)
Centre:Polypropylene
Bearing:Single ball bearing

INFORD® 150kg

J21 Japanese plastic hand truck casters
手推车用脚轮



Swivel caster	Rigid caster										
J21 XPBR 130 S		130	36	125X110	110/80X80/56	11	41	177	150		
	J21 XPBR 130 R	130	36	140X94	112/100X56/53	11	41	177	150		

Wheel:XPBR 圆边高弹轮(双滚珠轴承)65°A±5°

Tread:Elastic thermoplastic rubber(round)
Centre:Polypropylene
Bearing:Double ball bearing

ENAQ
Elastic rubber on nylon
wheel available
可选尼龙芯弹力胶轮
(单滚珠轴承)

		kg
100	30	70
130	36	150